


千分尺旋钮

Micrometer Heads



CAD 2D 3D


(E-)MHTF · MHTR13/15 (E-)MHTF · MHTR6.5 (E-)MHTF · MHTR6.5/13/15 (E-)MHQF · MHQR6.5/13/15

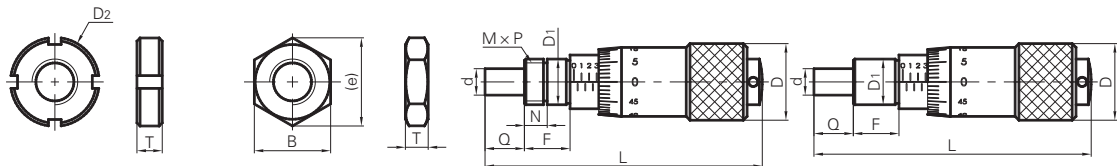

(E-)MHTF · MHTR25/50

(E-)MHTF · MHTR25/50

(E-)MHQF · MHQR25/50

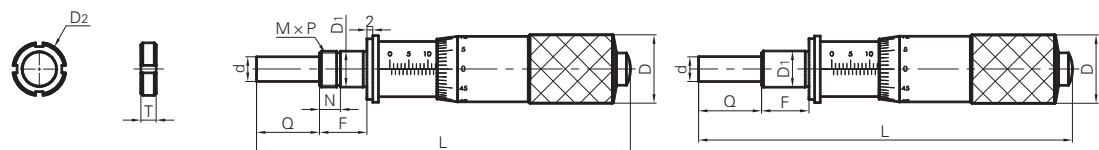

① 示意图均为前端平面

螺丝止动 · 前端平面

型式	No.	D	$D_{1-0.03}^0$	d	Q	F	L
MHQR	6.5	10	6	3.5	5.75	6	37
	13	13	9.5	5	11.4	9.5	59.2
	15	13	9.5	5	10.4	9.5	59.2
	25	18	9.5	6.5	16.6	12.5	98.45
	50	20	12	6.5	33.83	29	177.53
E-MHQR (经济型)	13	13	9.5	5	11.4	9.5	59.2
	25	18	9.5	6.5	16.6	12.5	96.95

螺母紧固 · 前端平面

型式	No.	MxP	D	$D_{1-0.03}^0$	D ₂	d	Q	F	N	L	T	B	(e)
MHTF	6.5	6 x 0.5	10	6	—	3.5	5.75	6	3	37	3	10	11.55
	13	9.5 x 0.5	13	9.5	14	5	11.4	9.5	5	59.2	4	—	—
	15		13	9.5	14	5	10.4	9.5	5	59.2			
	25	12 x 0.5	18	9.5	14	6.5	16.6	12.5	5.5	98.45			
	50		20	12	16	6.5	33.83	29	5	177.53			
E-MHTF (经济型)	13	9.5 x 0.5	13	9.5	14	5	11.4	9.5	5	59.2	4	—	—
	25		18	9.5	14	6.5	15.1	12.5	5.5	96.95			

螺丝止动 · 前端平面

型式	No.	D	$D_{1-0.03}^0$	d	Q	F	L
MHQF	6.5	10	6	3.5	5.75	6	37
	13	13	9.5	5	11.4	9.5	59.2
	15	13	9.5	5	10.4	9.5	59.2
	25	18	9.5	6.5	16.6	12.5	98.45
	50	20	12	6.5	33.83	29	177.53
E-MHQF (经济型)	13	13	9.5	5	11.4	9.5	59.2
	25	18.3	10	6.5	27	15	95.8

螺母紧固 · 前端平面

型式	No.	MxP	D	$D_{1-0.03}^0$	D ₂	d	Q	F	N	L	T	B	(e)
MHTR	6.5	6 x 0.5	10	6	—	3.5	5.75	6	3	37	3	10	11.55
	13	9.5 x 0.5	13	9.5	14	5	11.4	9.5	5	59.2	4	—	—
	15		13	9.5	14	5	10.4	9.5	5	59.2			
	25	9.5 x 0.5	18	9.5	14	6.5	16.6	12.5	5.5	98.45			
	50		20	12	16	6.5	33.83	29	5	177.53			
E-MHTR (经济型)	13	9.5 x 0.5	13	9.5	14	5	11.4	9.5	5	59.2	4	—	—
	25		18	9.5	14	6.5	15.1	12.5	5.5	96.95			



订货范例
Order

型式

MHQR6.5



10 个工作日