

Magnets with Housings


聚氨酯缓冲型



聚氨酯缓冲型



CAD 2D 3D

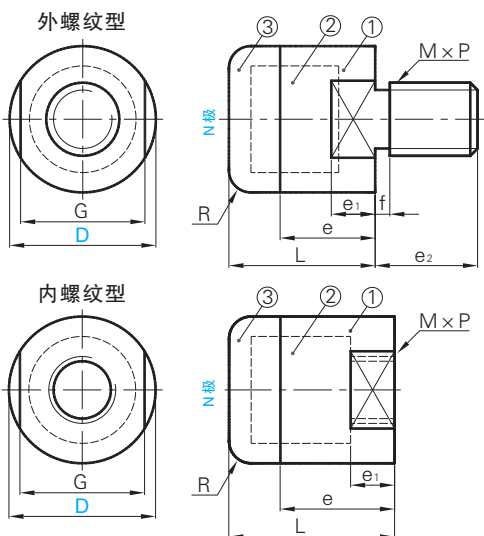

型号		①	②	③		最高工作温度
外螺纹	内螺纹	 材质	 材质	 材质	 硬度	
MRNC	MRNM	0Cr18Ni9	钹磁铁	聚氨酯	肖氏A90	80℃
MRNH	MRNL					

型式		M × P	L	e	e ₁	e ₂	f	G	R	吸附力 [kgf]	表面磁通密度 高斯 (G)
型号	D										
外螺型 MRNC MRNH	10	M5 × 0.8	16	10	4	7	1	8	1	0.38	3000 ~ 3200
	12	M6 × 1.0				10		10	2	0.6	2900 ~ 3100
	16	M8 × 1.25	18	11	5	12		14		0.8	2700 ~ 2900
	20	M10 × 1.5	20	13	6		14	17	3	1.78	2600 ~ 2800
	25			22	15	8		22		3.55	2900 ~ 3100

① 吸附力、表面磁通密度为参考值。

型式		M×P	L	e	e ₁	G	R	吸附力 { kgf }	表面磁通密度 高斯 (G)
型号	D								
内螺纹型 MRNM MRNL	10	M4×0.7	15	9	4	8	1	0.38	3000~3200
	12					10	2	0.6	2900~3100
	16	M5×0.8	17	10	5	14	3	0.8	2700~2900
	20					17		1.78	2600~2800
	25					22		3.55	2900~3100

①吸附力、表面磁通密度为参考值。



🔔 订货范例
Order

型式


MRNC10



5 个工作日

去掉可选
加工

定制加工



可按图纸定制加工



可定制铝镍钴磁铁



可定制铁氧体磁铁



磁性零部件