

螺栓滚子轴承
Bolt Roller Bearings

带润滑脂补充孔型




球面型




CAD 2D 3D

Table with 4 columns: 型号, M 材质, A 附件, 带密封圈型. Row 1: YBTRU, GCr15, SUJ2, 1个六角螺母(钢・四氧化三铁保护膜).

①使用环境温度: 80℃以下。

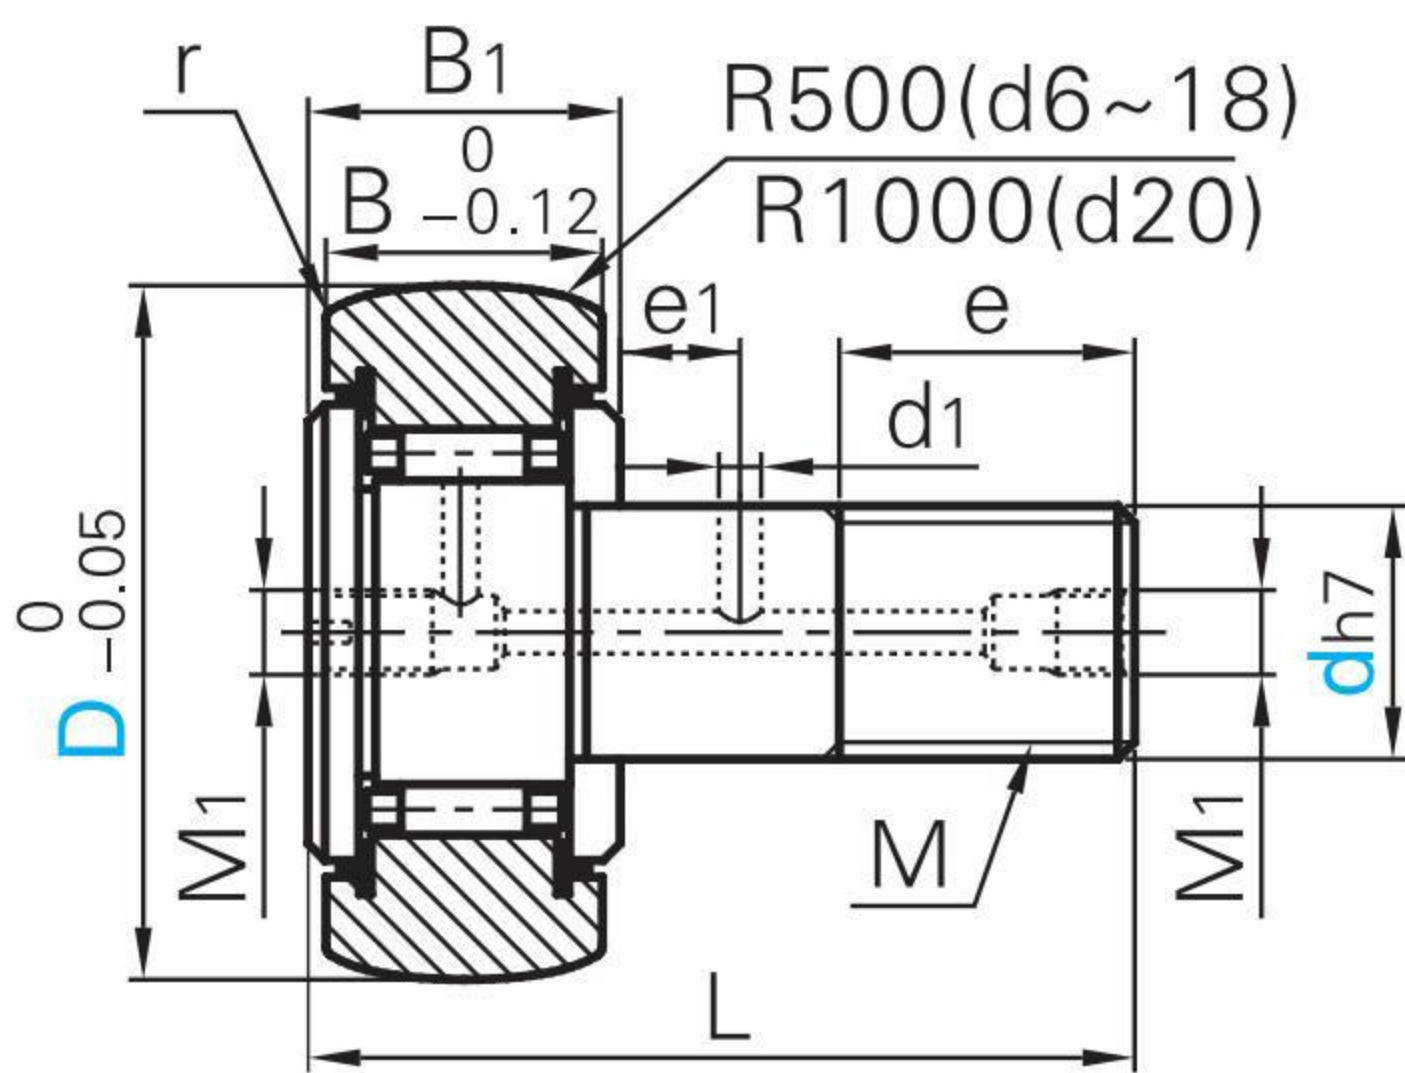

安装示例

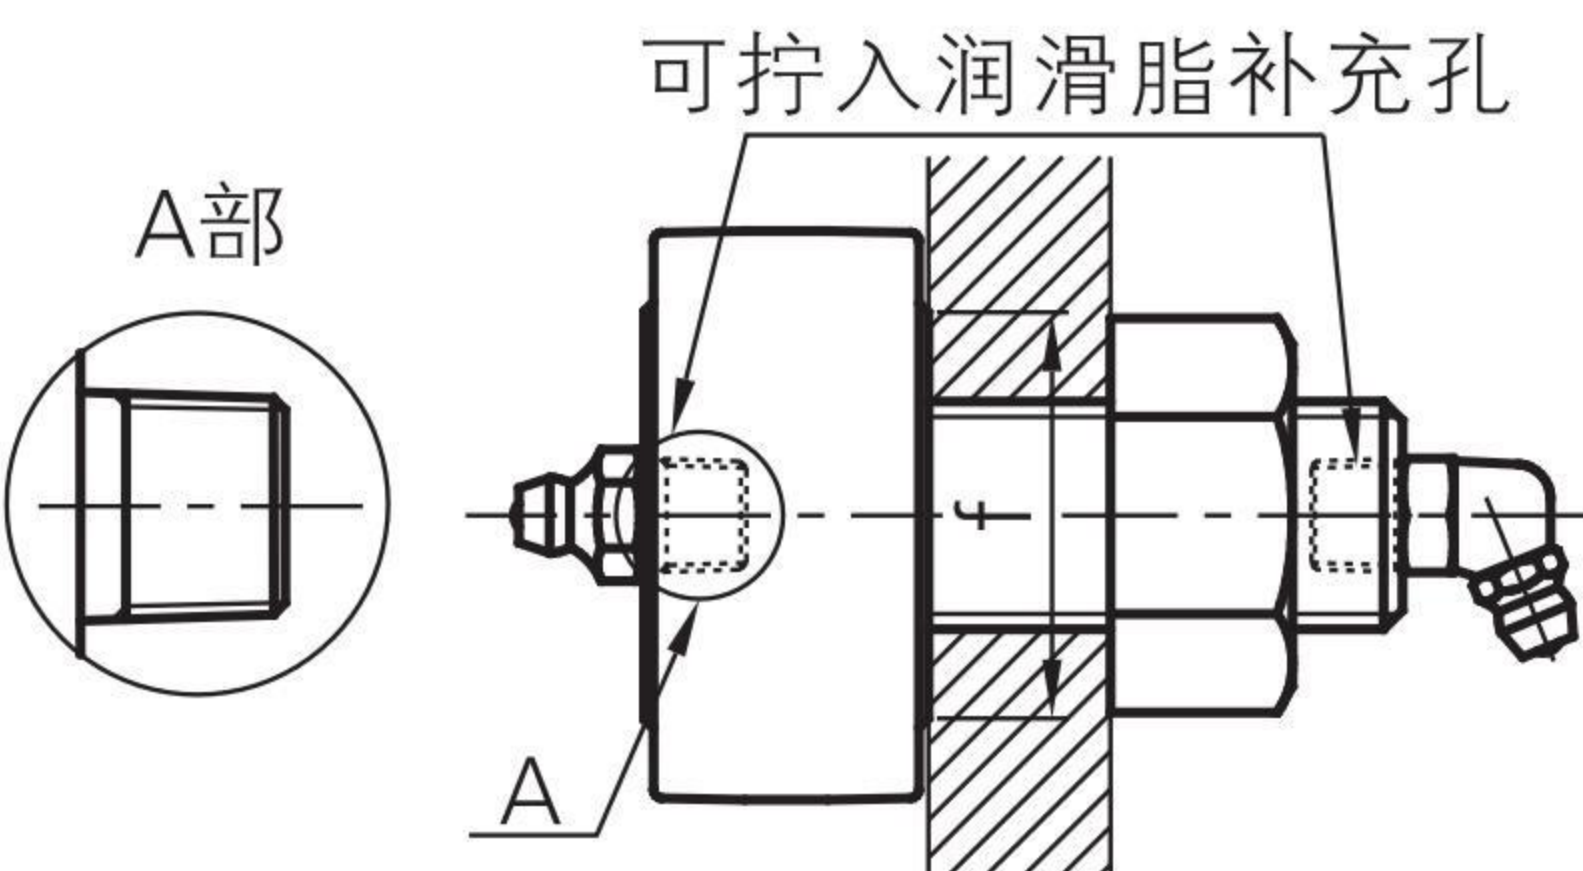

Main specification table for YBTRU bearings with columns for dimensions (D, B, B1, L, d1, e, e1, r, f), load ratings (C, Cor), and speed/weight.

①*d10以下时, 润滑脂补充孔用安装螺纹孔仅加工在头部。 ②三益不承诺轴承的品牌。

Order form section with fields for 型号 (YBTRU6), D (16), and 5 个工作日.


圆柱型



CAD 2D 3D

Table with 4 columns: 型号, M 材质, A 附件, 带密封圈型. Row 1: YBTFU, GCr15, SUJ2, 1个六角螺母(钢・四氧化三铁保护膜).

①使用环境温度: 80℃以下。

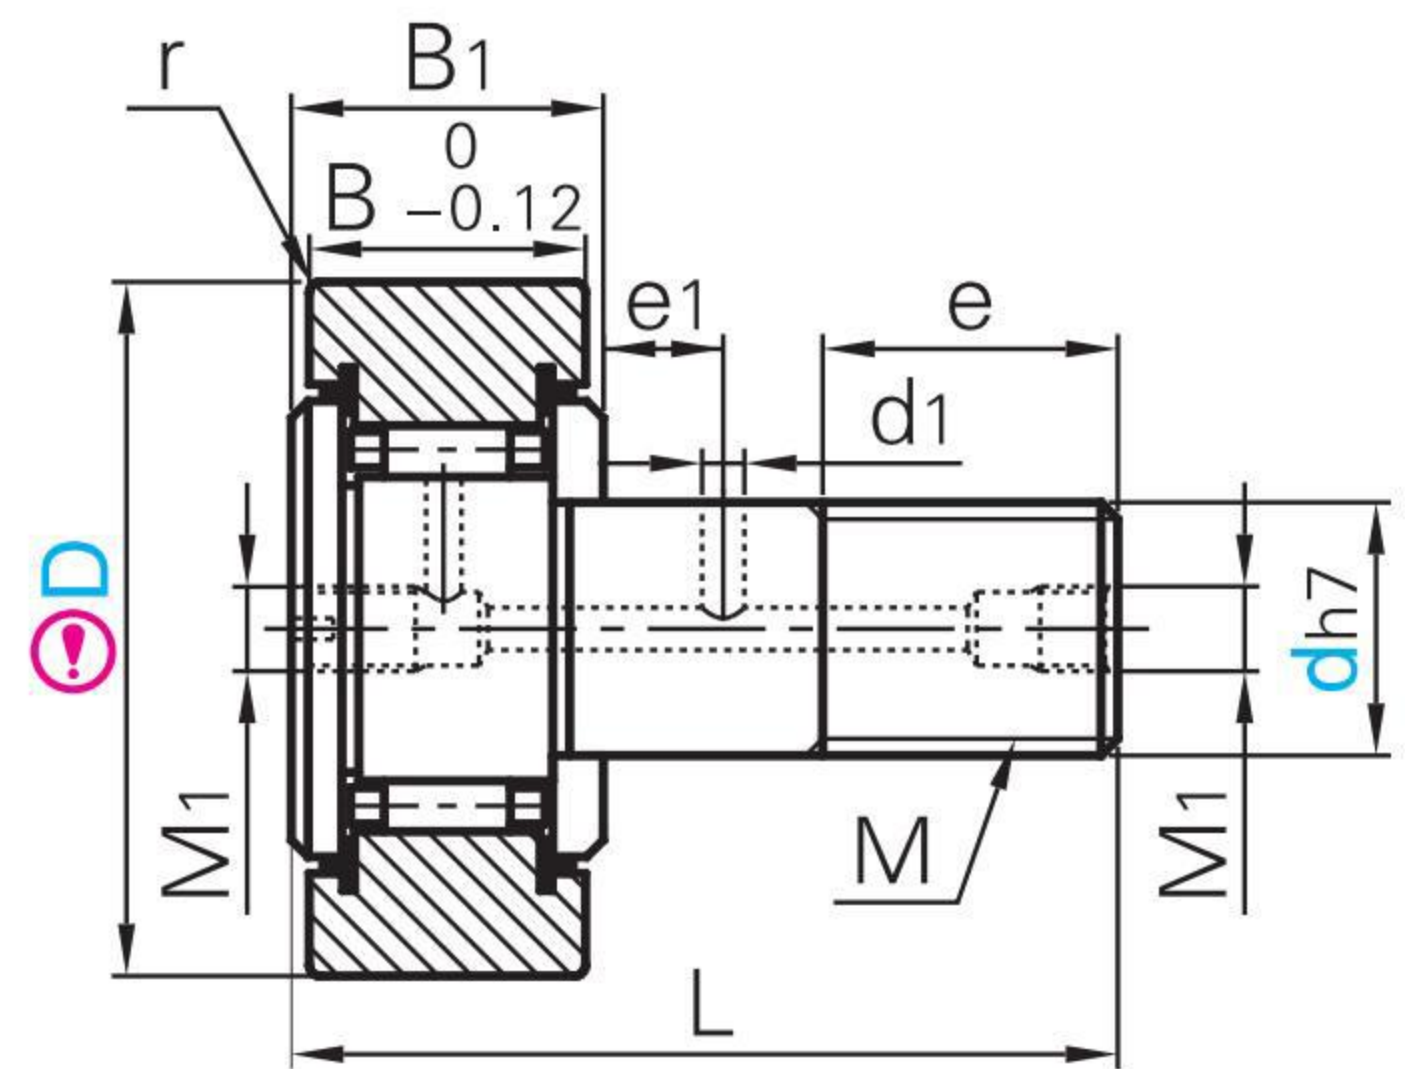

安装示例

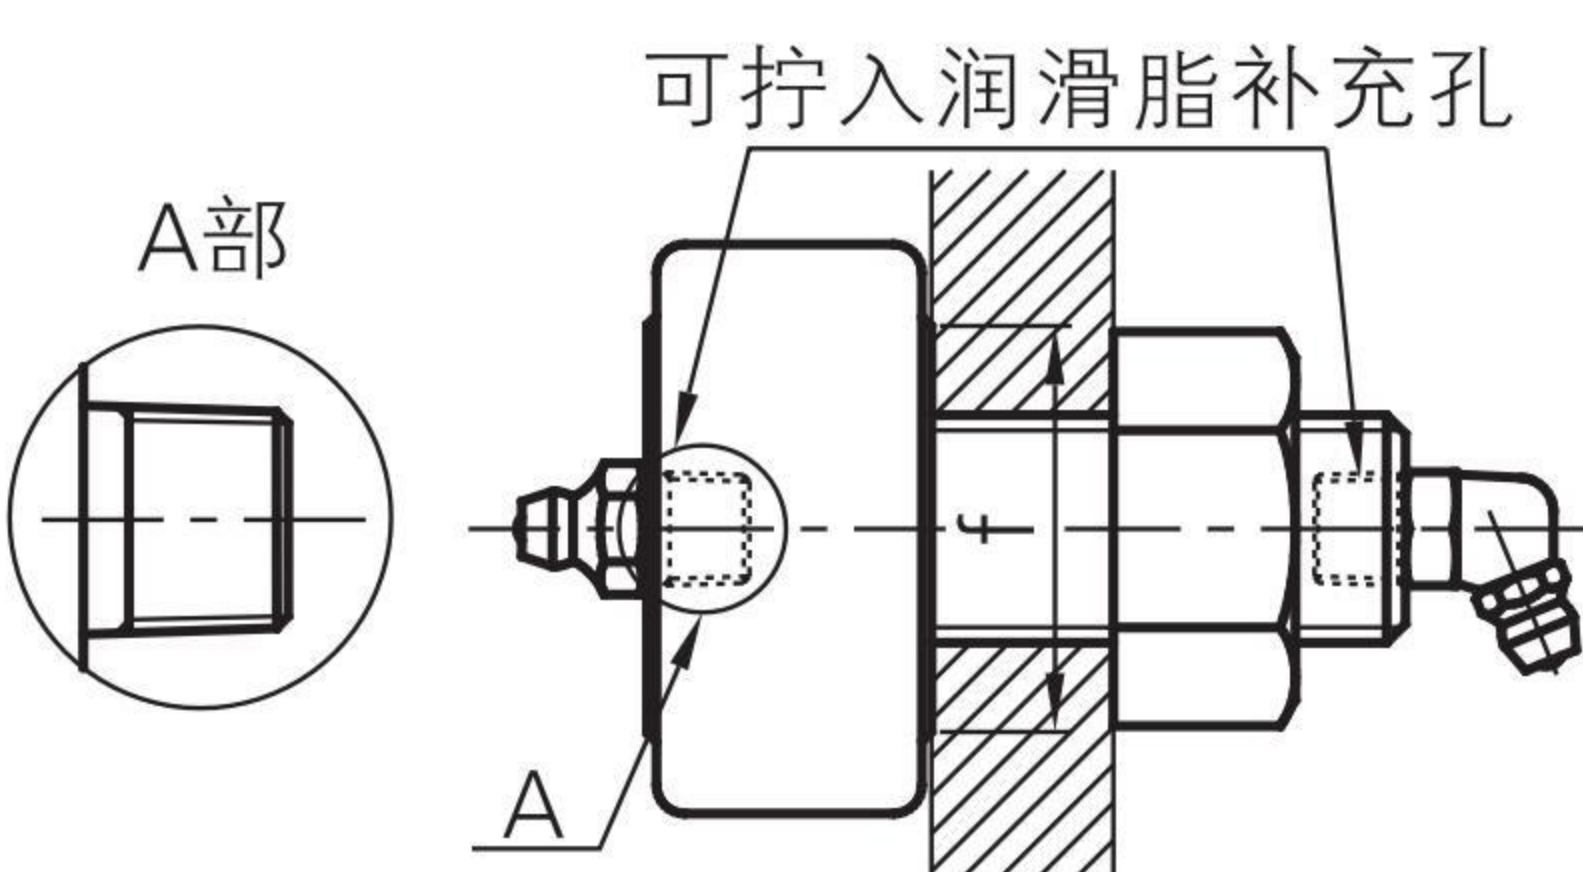


Table titled 'YBTFU型D尺寸公差' showing tolerance ranges for different D values.

Main specification table for YBTFU bearings with columns for dimensions (D, B, B1, L, d1, e, e1, r, f), load ratings (C, Cor), and speed/weight.

①*d10以下时, 润滑脂补充孔用安装螺纹孔仅加工在头部。 ②三益不承诺轴承的品牌。

Order form section with fields for 型号 (YBTFU6), D (16), and 5 个工作日.