

直杆定位销

Dowel Pins Straight Type

负公差
h7型 · h7倒角型

NEW

新产品

绿色字体型号

h7型



CAD

2D


3D

型号	M 材质		H 硬度
	国标	相当	
DPH	9Cr18	SUS440C	45~50HRC
DPHS	0Cr18Ni9	SUS304	-
DPHH	GCr15	SUJ2	58HRC

① 识别槽仅DPH适用

① Φ1.5以下无识别槽

① e1尺寸可能会因外径研磨加工而大于产品目录中的值。

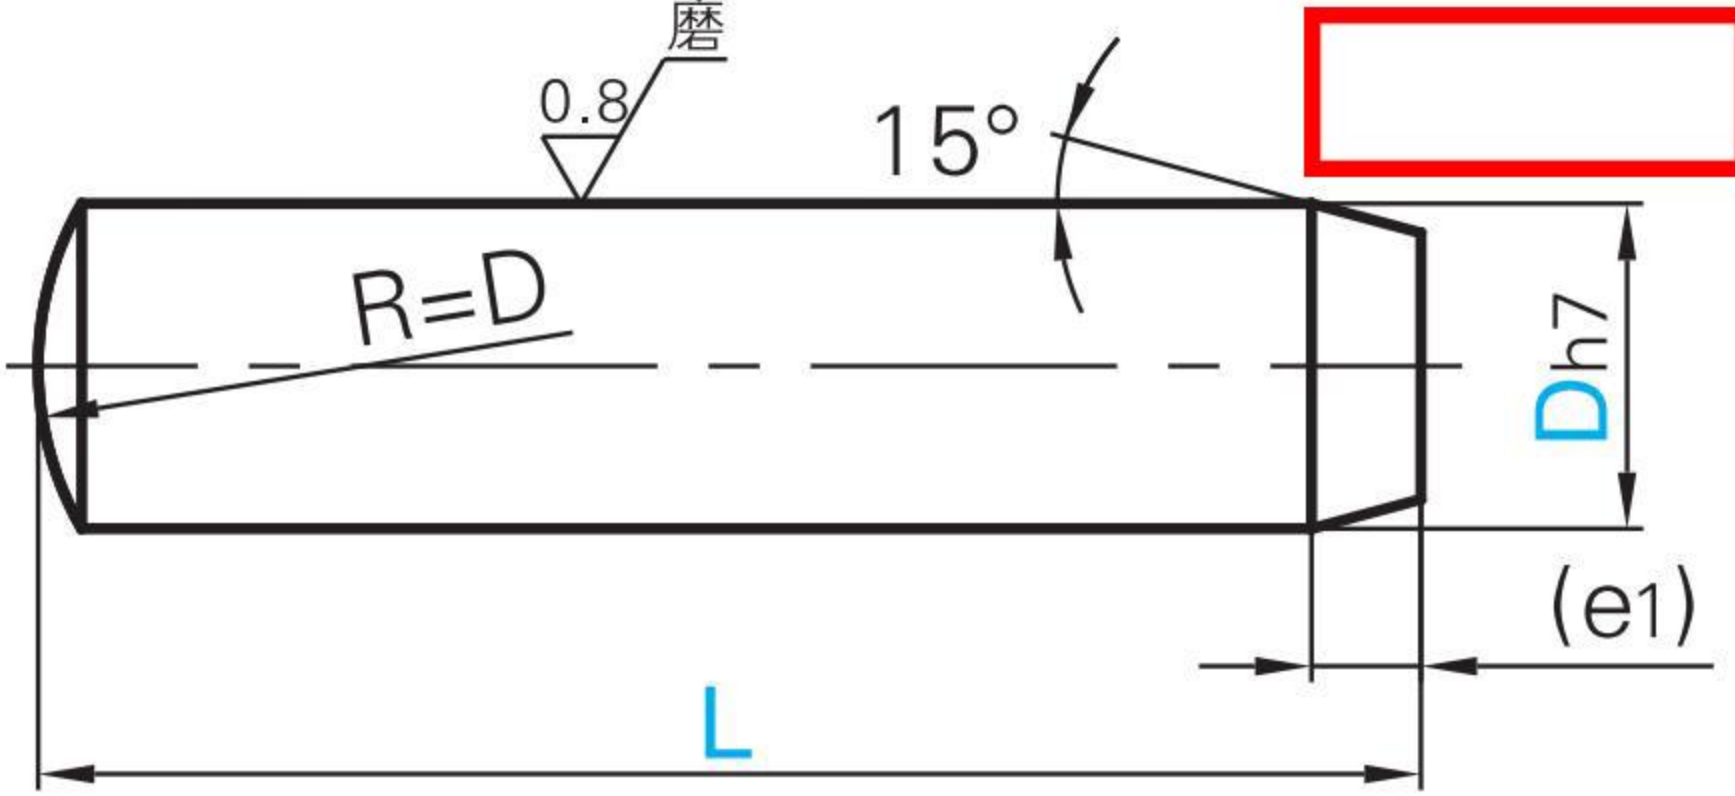

型式		L														e ₁	D _{h7}
型号	D																
DPH	1	5	6	8	10										0.4	0 - 0.010	
	1.5	5	6	8	10										0.6		
	2	5	6	8	10	12	15	20							1		
	2.5	6		8	10	12	15	20	25	30							
	3	6		8	10	12	15	20	25	30	35	40					
	4	8			10	12	15	20	25	30	35	40	45	50	1.5	0 - 0.012	
	5	8			10	12	15	20	25	30	35	40	45	50			
	6	8			10	12	15	20	25	30	35	40	45	50			55
	8	10				15		20	25	30	35	40	50		60	2	0 - 0.015
	10					15		20	25	30	35	40	50		60		

型式		L									e ₁	D _{h7}
型号	D											
DPHS	1	5	6	8	10					0.4	0 - 0.010	
	1.5	5	6	8	10					0.6		
	2	5	6	8	10	12	15	18	20	1		
	2.5	6		8	10	12	15					
	3	6		8	10	12	15	18	20	1.5	0 - 0.012	
	4	8			10	12	15	18	20			
	5	8			10	12	15	18	20			
	6	10				12	15	18	20	2	0 - 0.015	
8	15					18	20					

型式		L					e ₁	D _{h7}
型号	D							
DPHH	2	6	8	10	15		1.0	0
	3		8	10	15	20		-0.010
	4			10	15	20	1.5	0
								-0.012

订货范例

Order

型式

-

L

DPH1

-

5



3 个工作日

h7倒角型



CAD

2D

3D

型号	M 材质		H 硬度
	国标	相当	
DPHHM	9Cr18	SUS440C	58HRC~
DPHSM	0Cr18Ni9	SUS304	-



型式		L						C	D _{h7}
型号	D								
DPHHM	2	6	(8)	10	12	15		0.3 以下	0 - 0.010
	3	6	8	10	12	15	(20)		
	4		8	10	12	15	20		
DPHSM	5		(8)	(10)	12	(15)	20	0.5	0 - 0.012
	6			10*	12	15	20*		
	8					15*	20*		

① () 内尺寸仅适用DPHHM; * 尺寸仅适用DPHSM。

订货范例

Order

型式

-

L

DPHHM2

-

6



3 个工作日