

平皮带用滑轮
Pulleys for Flat Belts

宽度L=110~510
圆弧型·带肋槽直柱型

NEW
新产品
绿色字体型号




CAD 2D 3D


Table with 5 columns: 型号 (Model), M 材质 (Material), S 表面处理 (Surface Treatment), 圆弧型 (Round type), 带肋槽直柱型 (Ribbed straight column type). Rows include PFCWA, PFCWN, PFCWS, PFGSWA, PFGSWN, PFGSWS with their respective materials and surface treatments.

其余 6.3

圆弧型

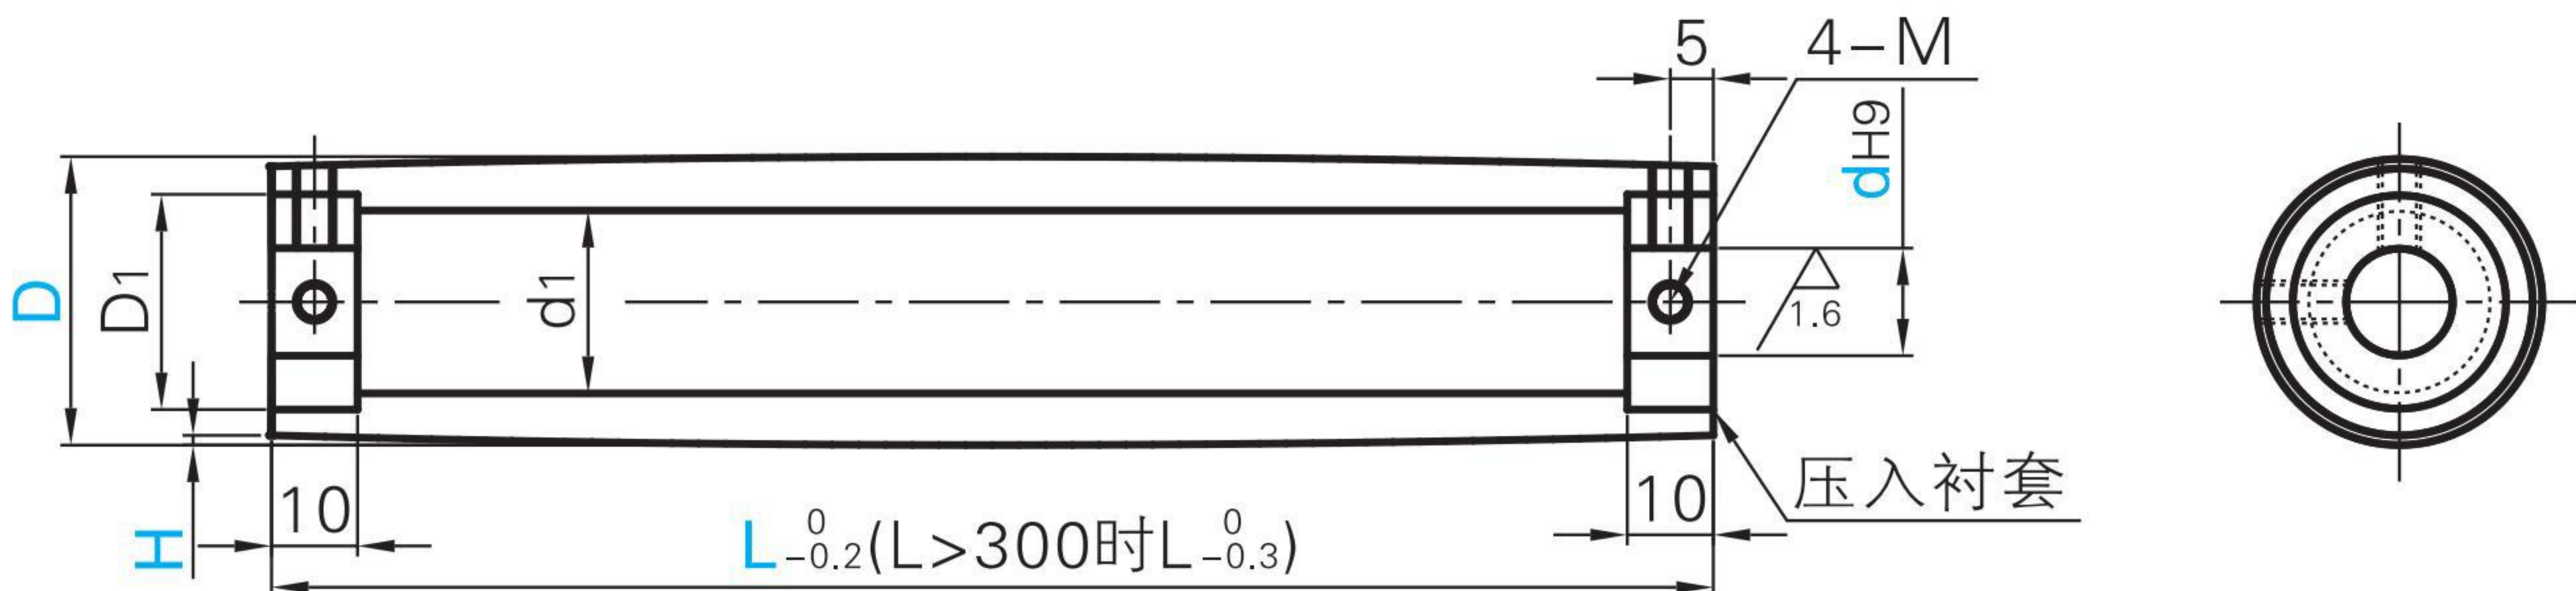


带肋槽直柱型

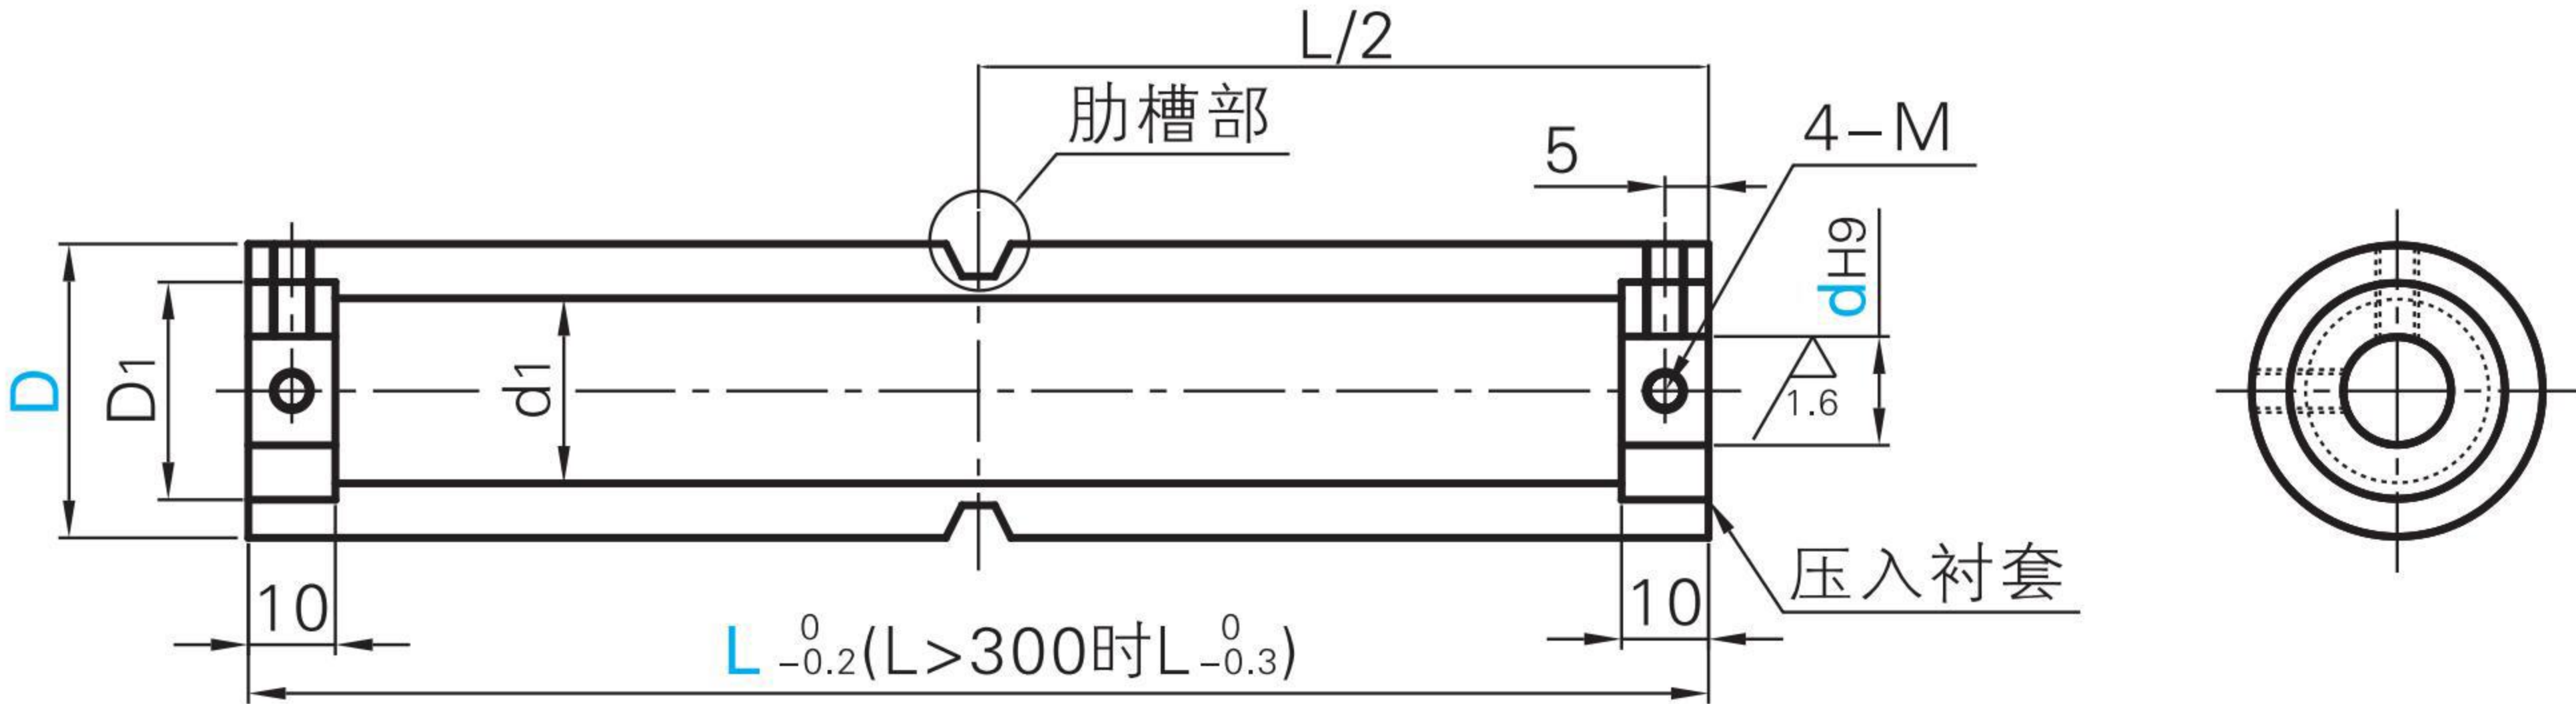

键槽尺寸

Table with 4 columns: 公称型号 (Nominal model), dH9, bJS9, t公差 (Tolerance). Rows list various keyway sizes from N8 to N35 with their corresponding dimensions and tolerances.

键槽形状

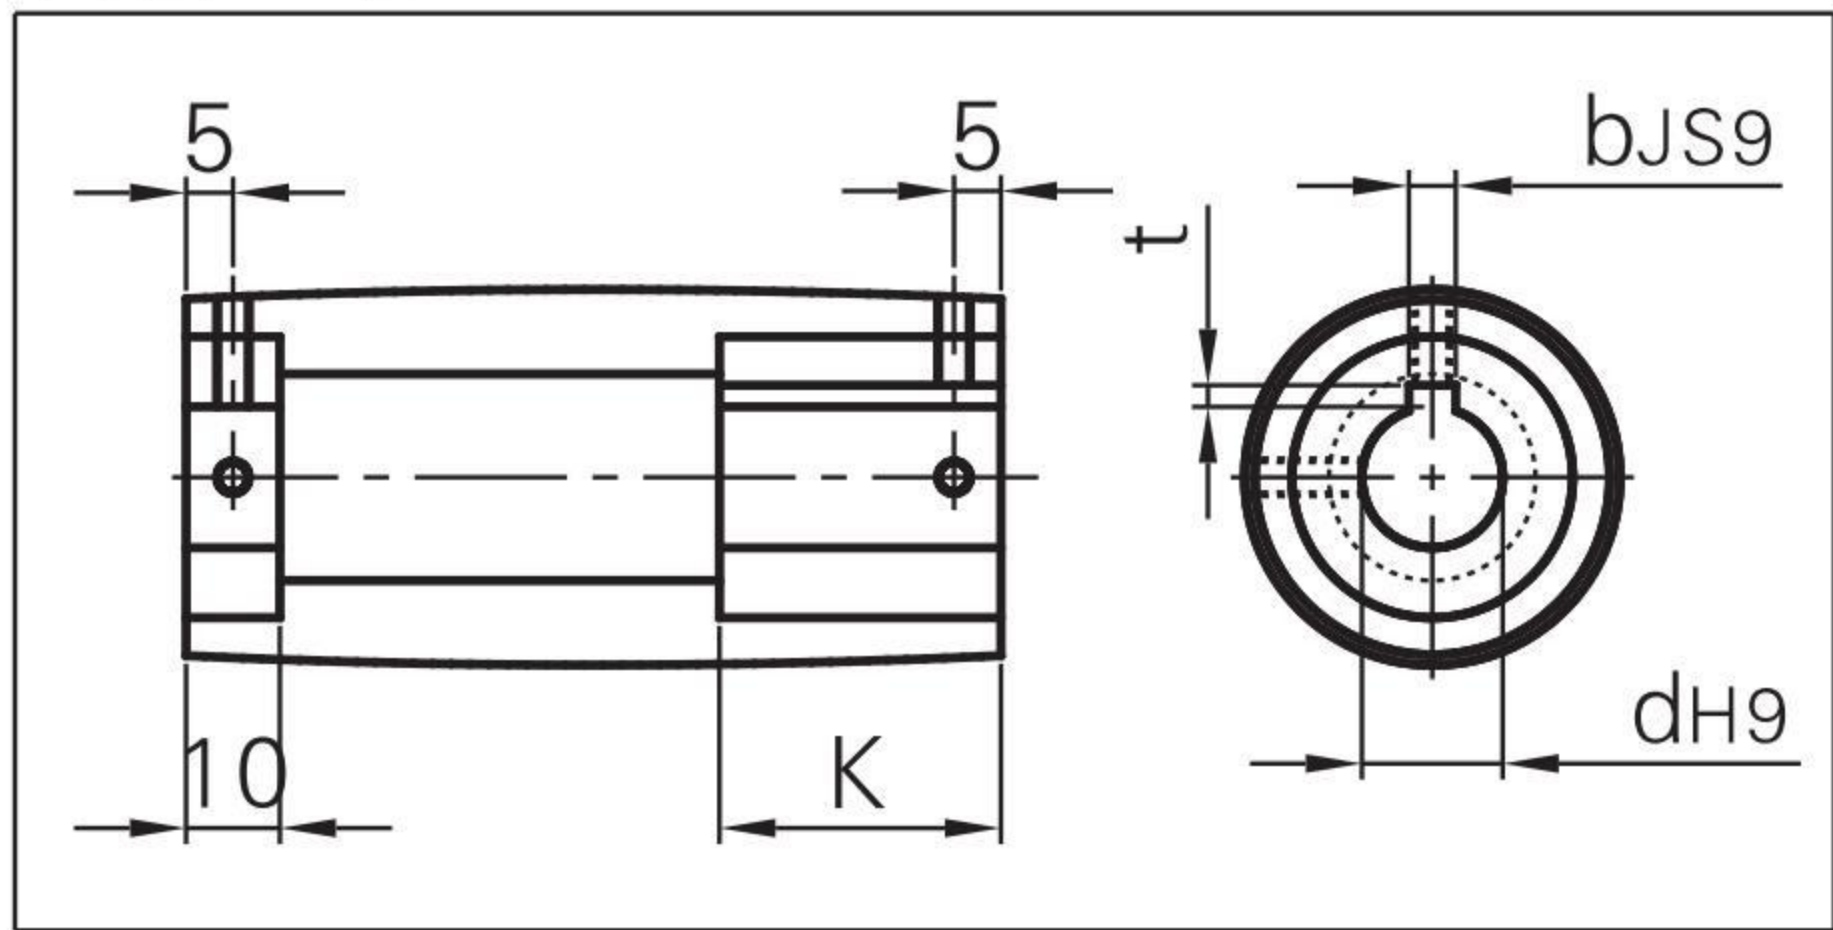

Main specification table with columns for 型式 (Type), 型号 (Model), D, dH9 (孔+螺纹孔), 指定单位 1mm (Specified unit 1mm), 仅圆弧型 H选择 (Only round type H selection), 仅带肋槽直柱型 指定单位0.1mm (Only ribbed straight column type specified unit 0.1mm), 键长度 (Key length), d1, D1, and M (粗牙螺纹) (Coarse thread). Rows detail various pulley models and their dimensions.

① 选购键槽孔+螺纹孔的轴孔直径10、键槽宽4.0mm(高1.8mm)的规格时，请指定NK10。

订货范例 Order: 型式 - d - L - H - X - Y - Z. Examples: PFCWA30 - P10 - L110 - H0.5, PFGSWA40 - N12 - L220 - X7.0 - Y10.0 - Z6.0

5 个工作日

皮带的肋形状与滑轮·惰轮避让尺寸

