

静音拖链用接头
Connector for Silent Drag Chain


NEW
新产品
绿色字体型号




CAD 2D 3D

Table with 7 columns: 型号, 类型, 适用拖链内高, 材质, 颜色, 允许温度, 阻燃等级. It lists models CCST1 through CCST5, all categorized as '静音型拖链用' (Silent Drag Chain Use), made of '工程塑料' (Engineering Plastic), black in color, with a temperature range of -40°C~120°C and UL94-V2 flame retardancy.


CCST1

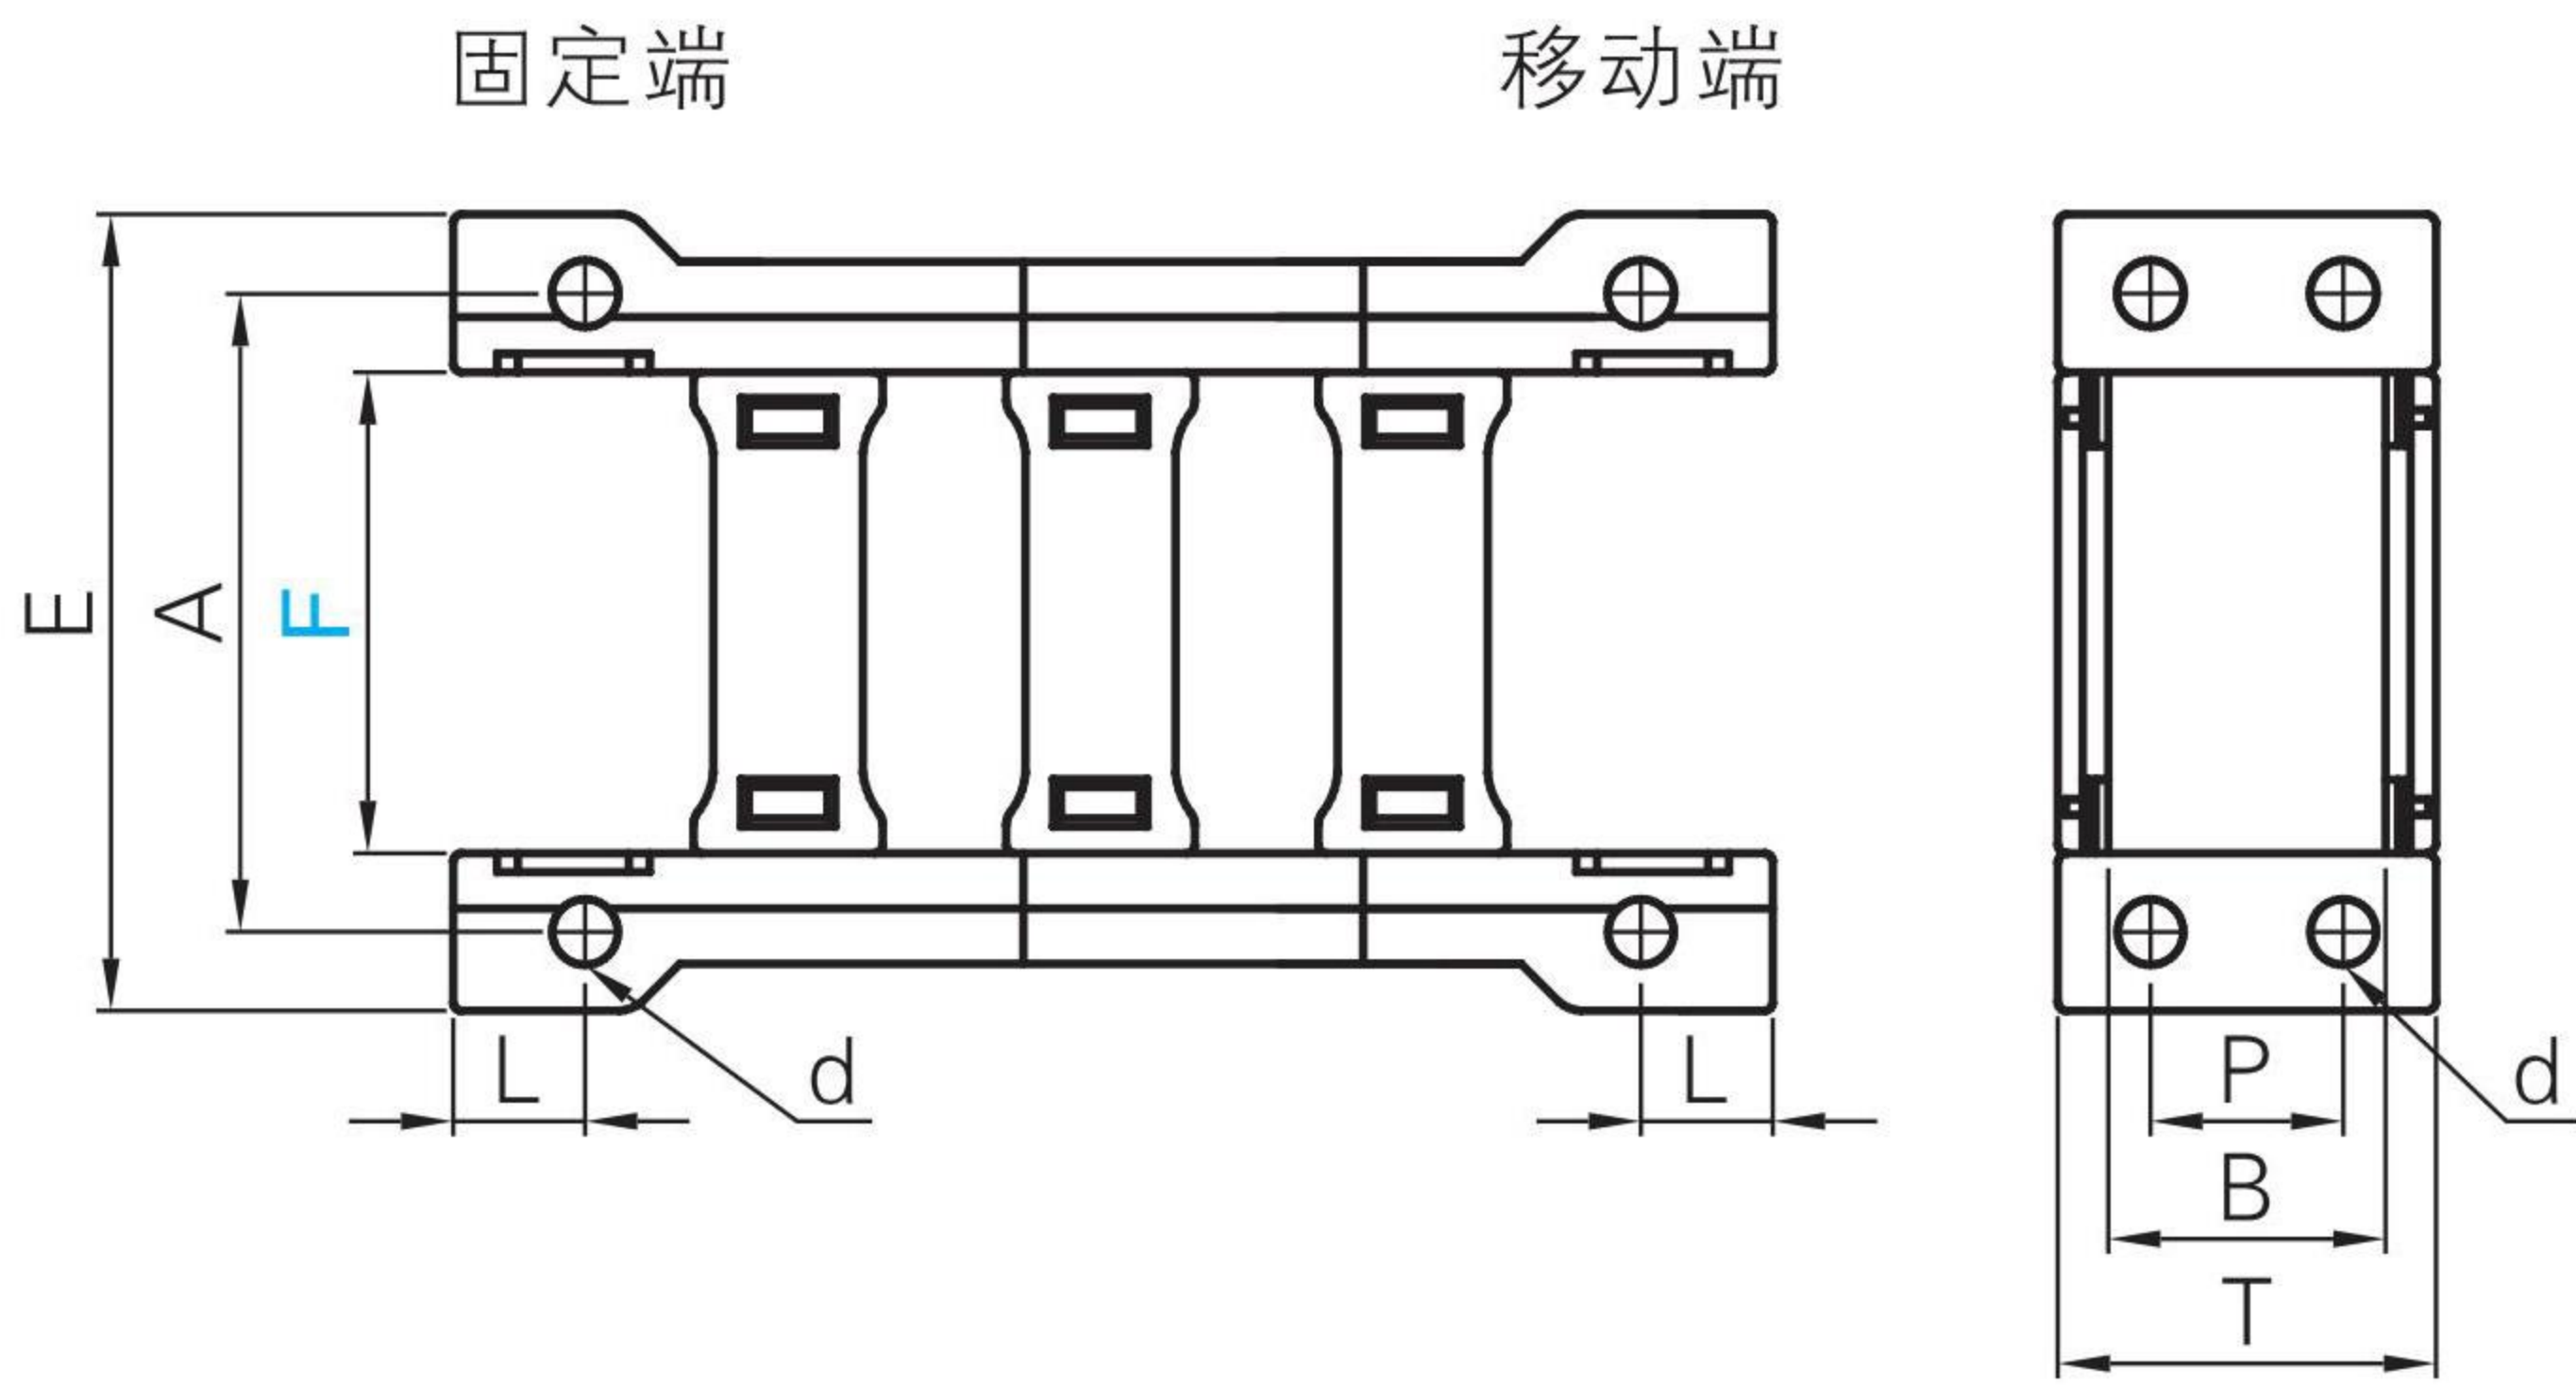


CCST2

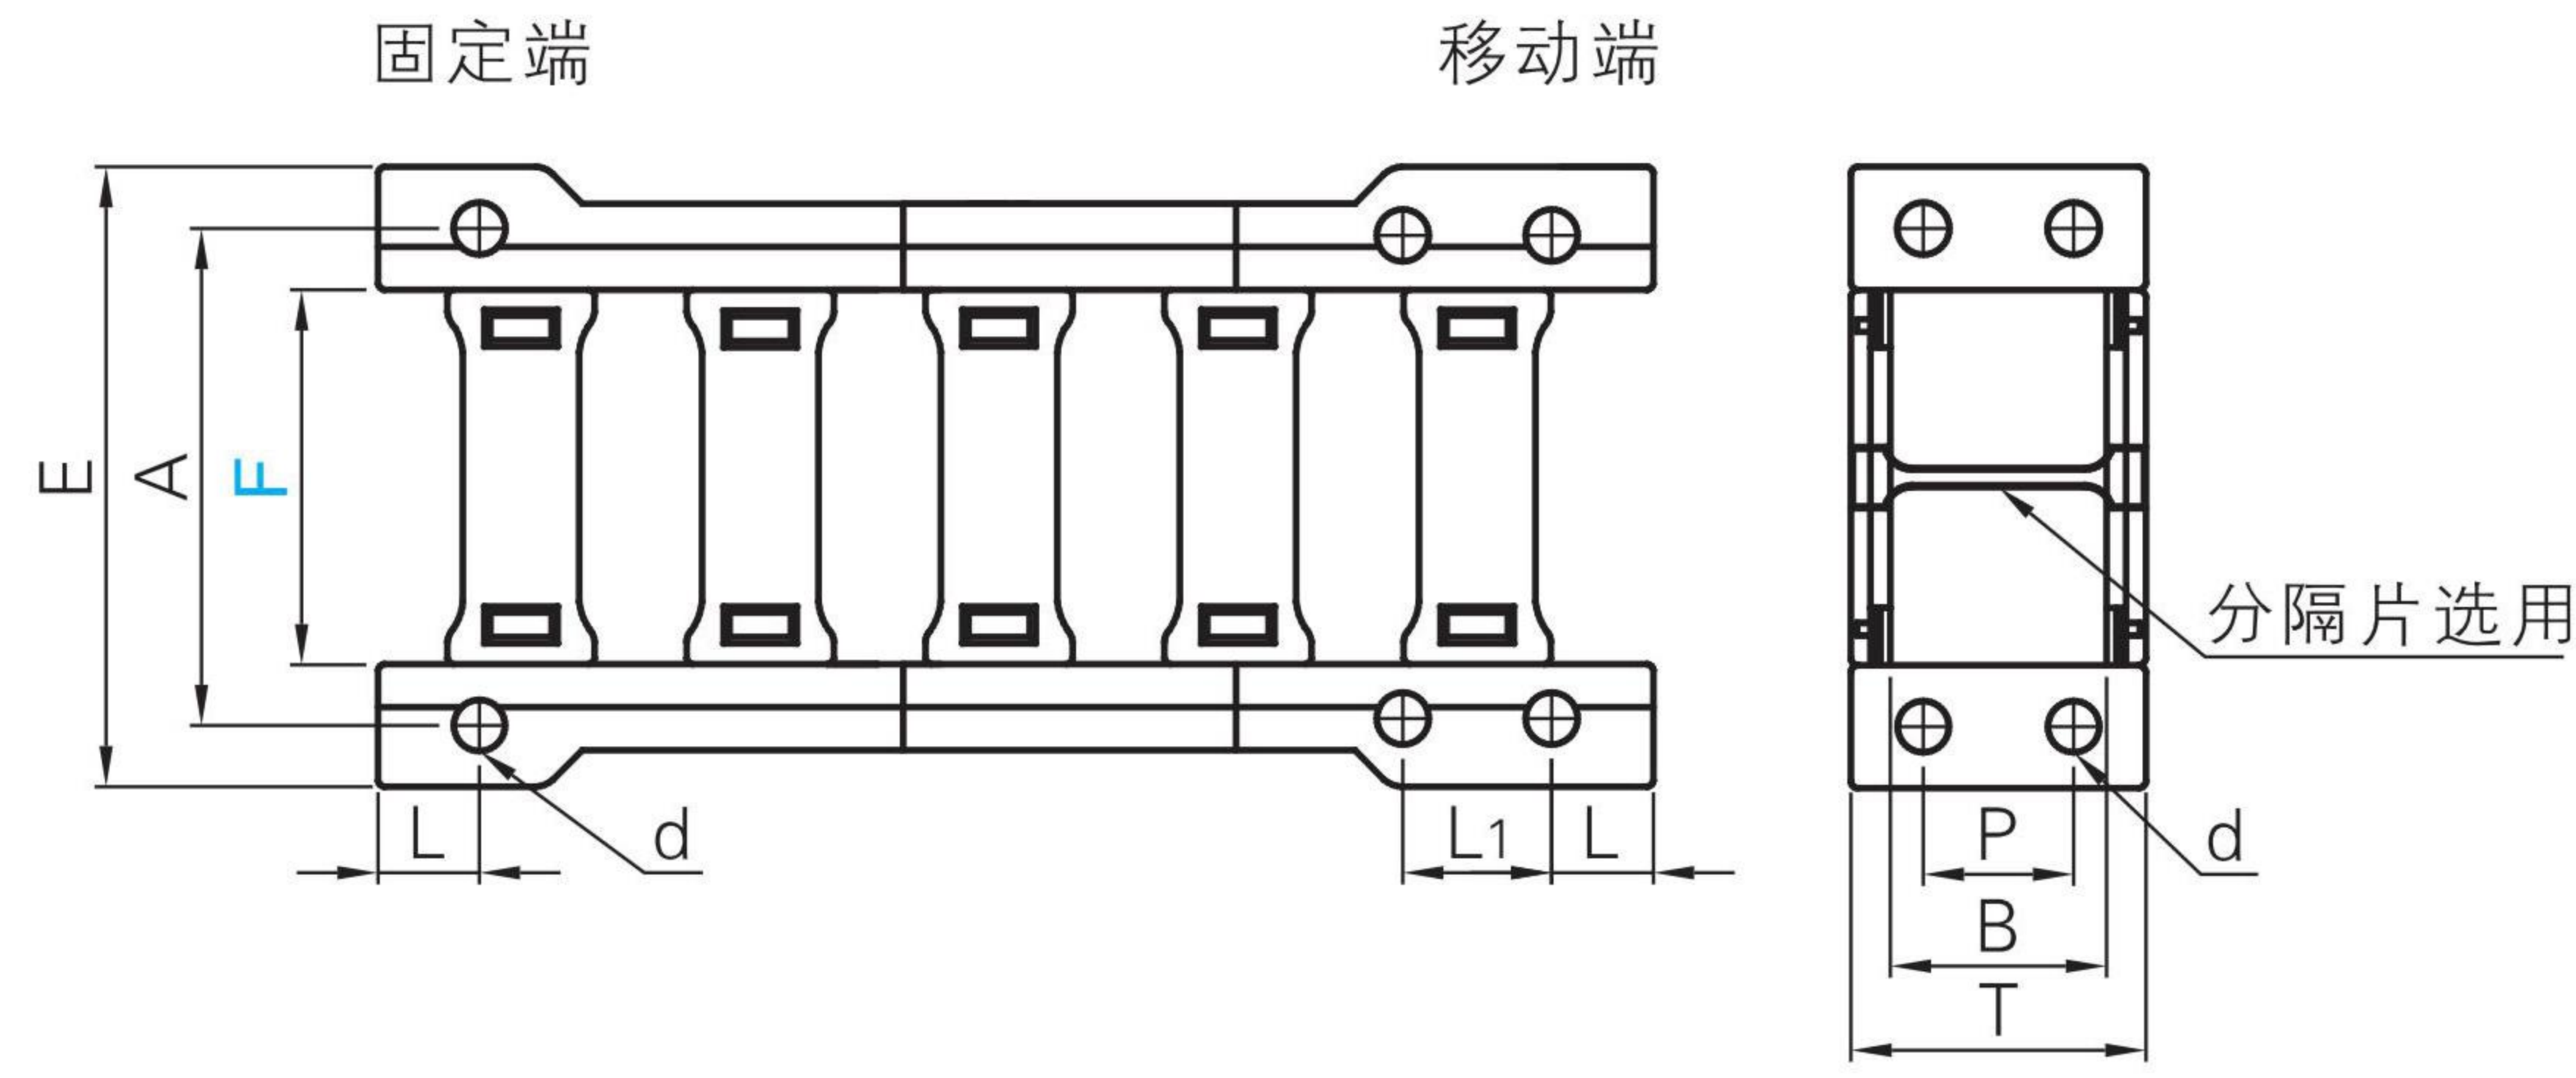

CCST3

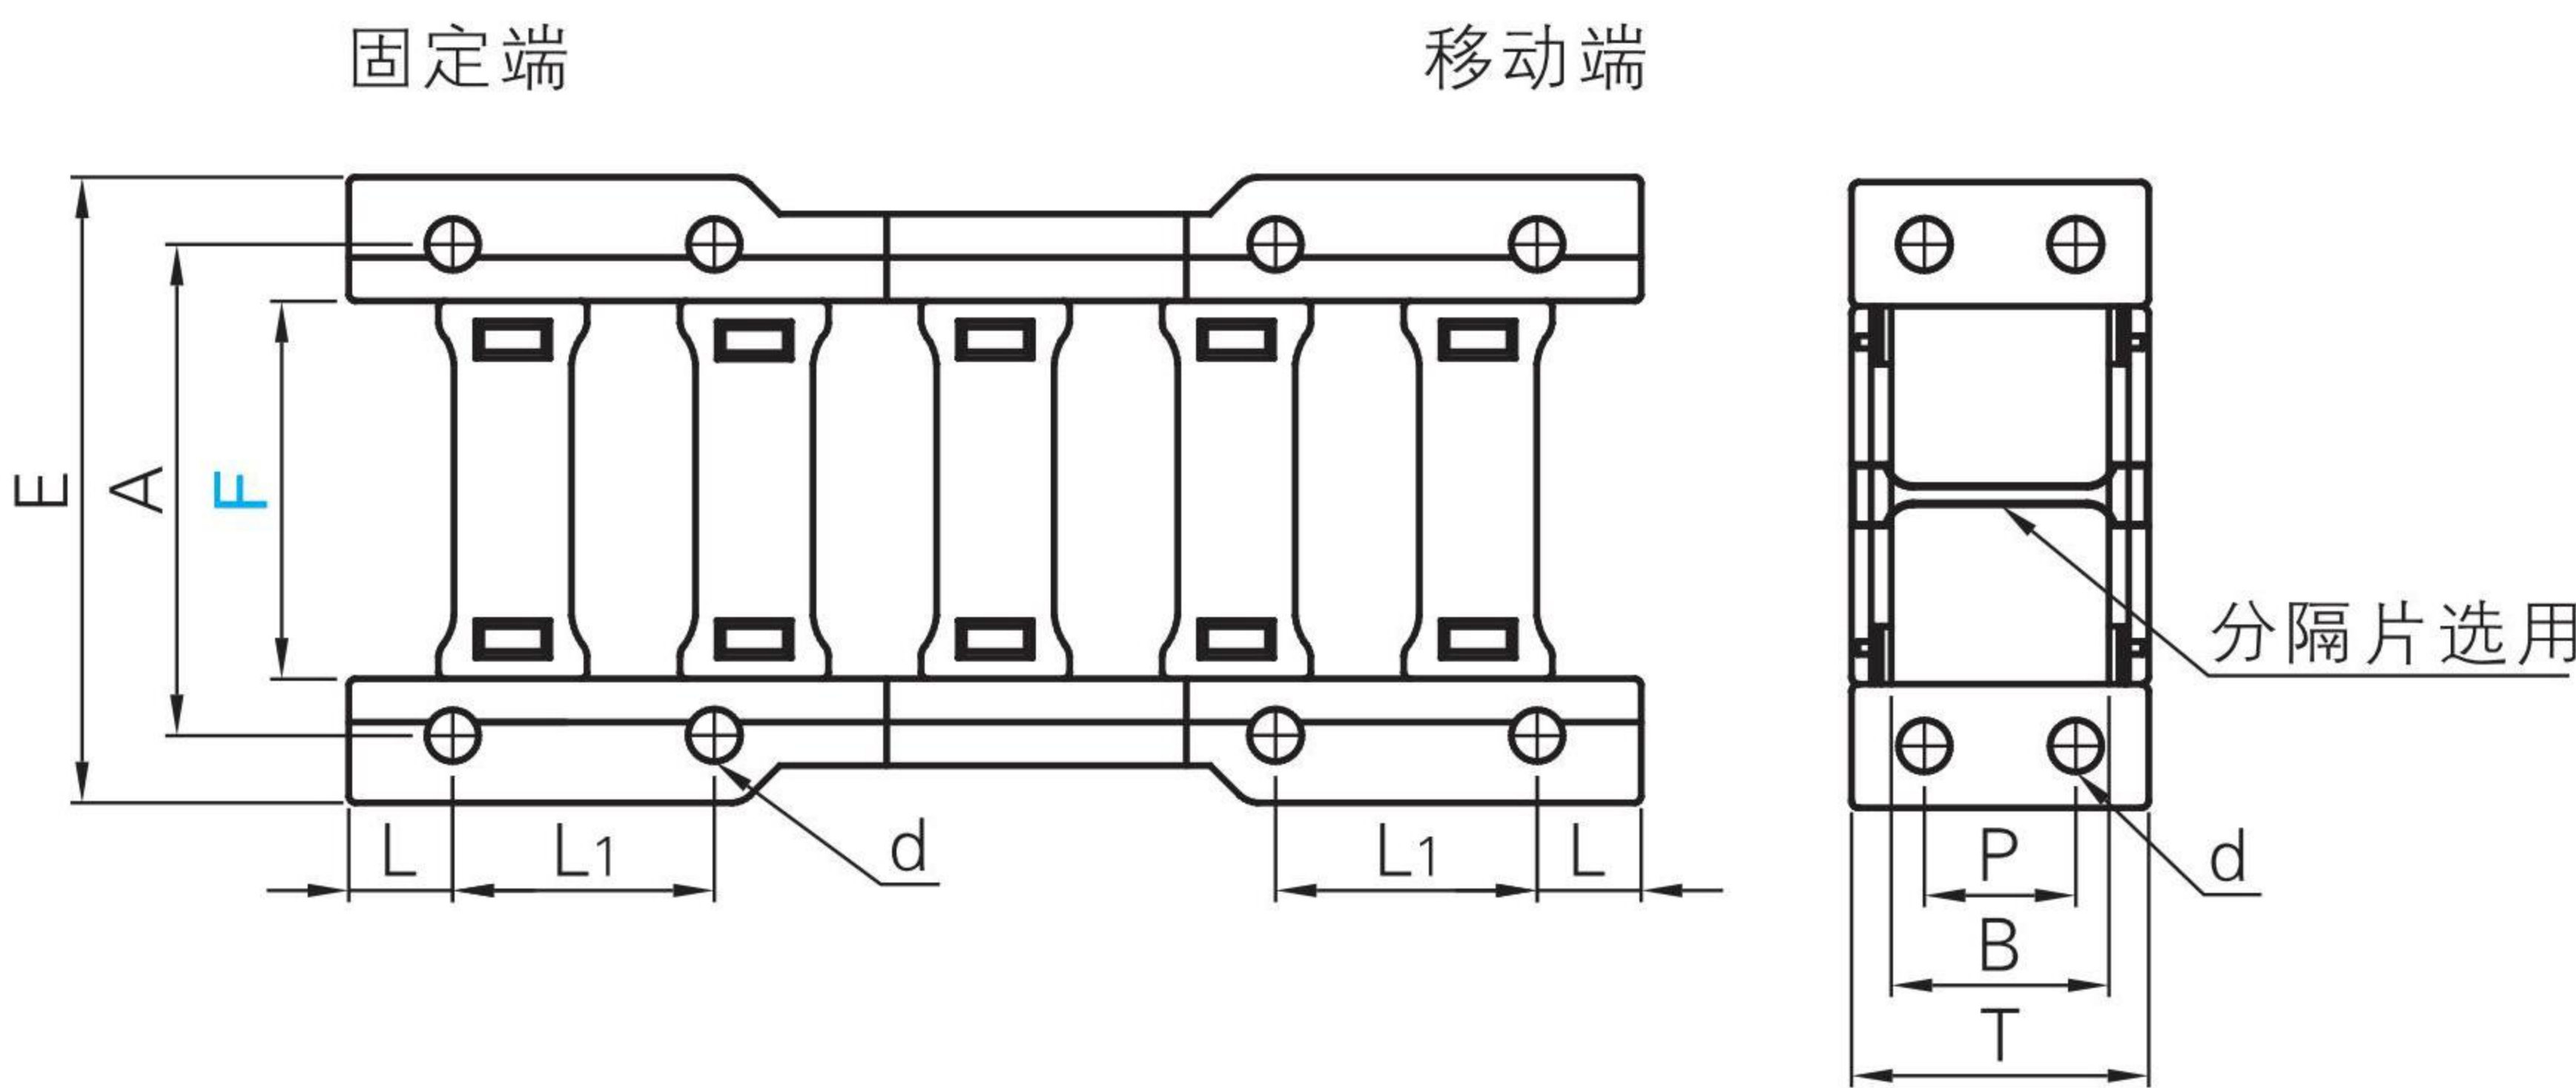

CCST4/CCST5

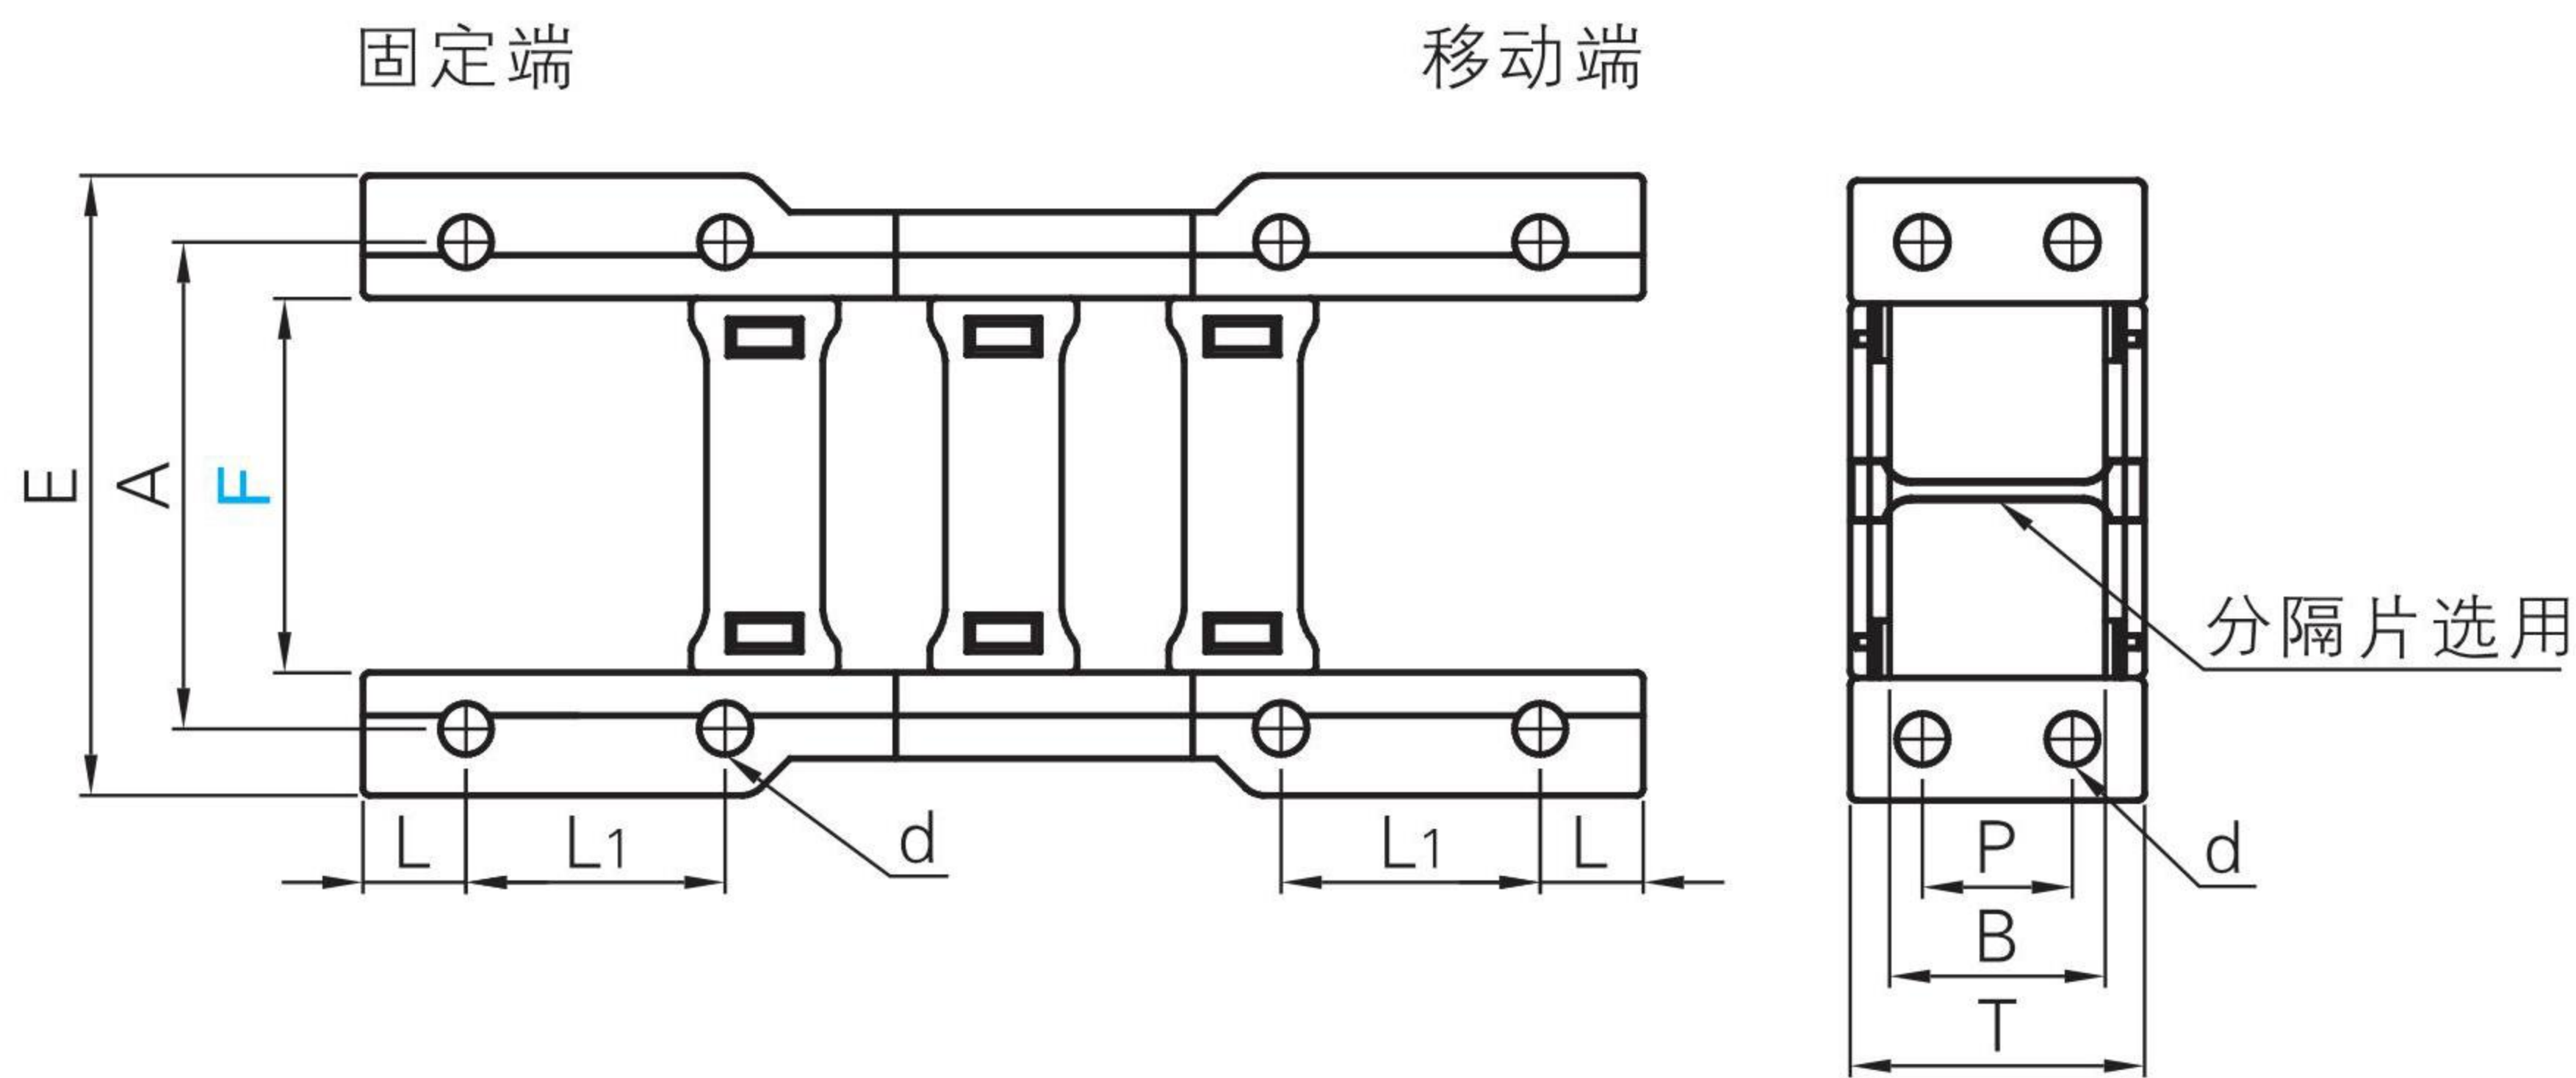

Main dimension table with 11 columns: 型式 (Model/Inner Width), A, E, L, L1, B, T, P, d, 适用拖链 (Applicable Drag Chain). It provides detailed dimensions for models CCST1 through CCST5. A red box highlights the 'd' column for models CCST2 through CCST5, showing values 4.3, 5.4, and 5.4 respectively.

订货范例 Order 型式 CCST350

5 个工作日

静音拖链接头