

链条导向件
Chain Guides

带槽钢型

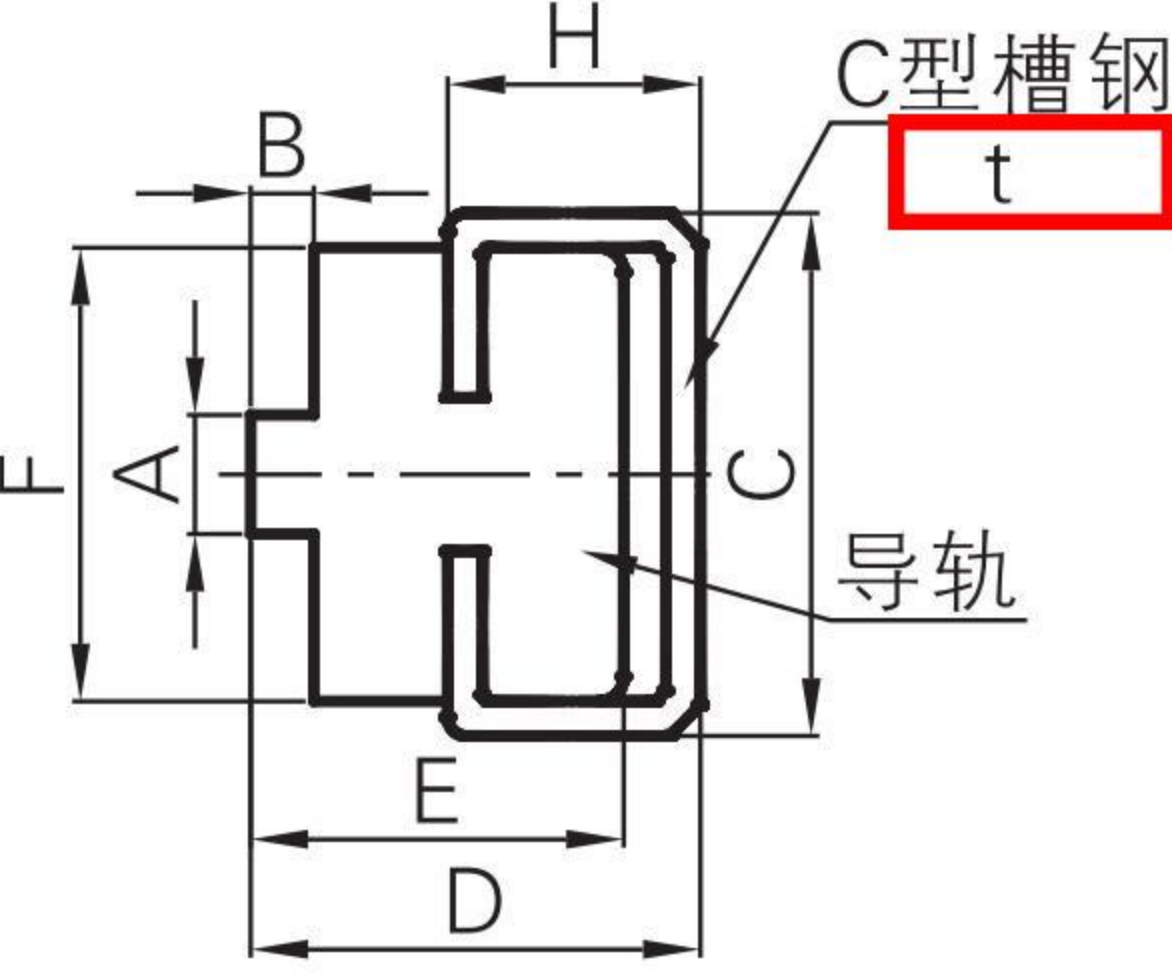




CAD 2D 3D

型号				M 材质	
L尺寸选择·无孔加工型		L尺寸指定·带孔加工型		导轨	C型钢
凸形	凹形	凸形	凹形	超高分子量聚乙烯	钢(镀锌)
CGTC	CGCC	CGLTC	CGLCC		不锈钢
CGTS	CGCS	CGLTS	CGLCS		

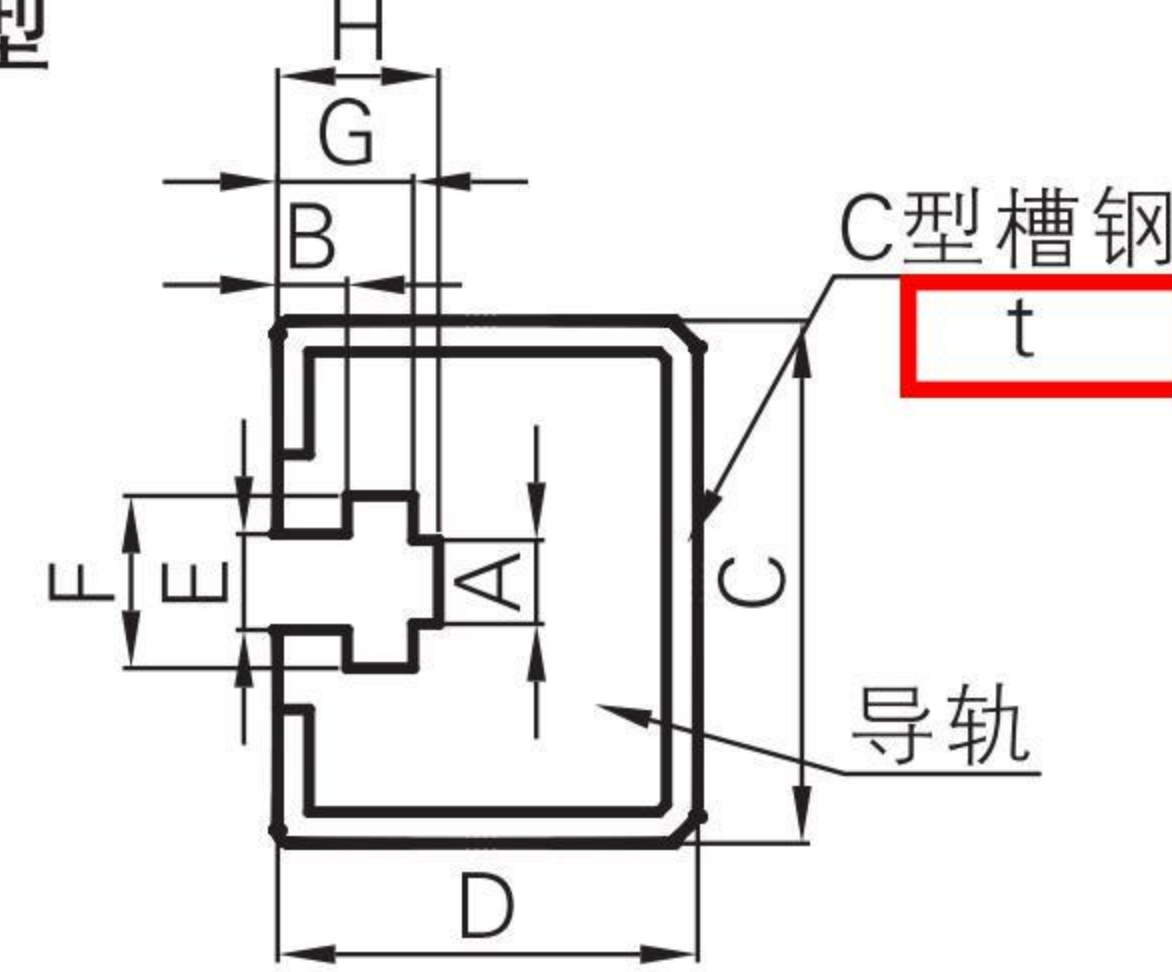
凸形



C型钢槽钢 t

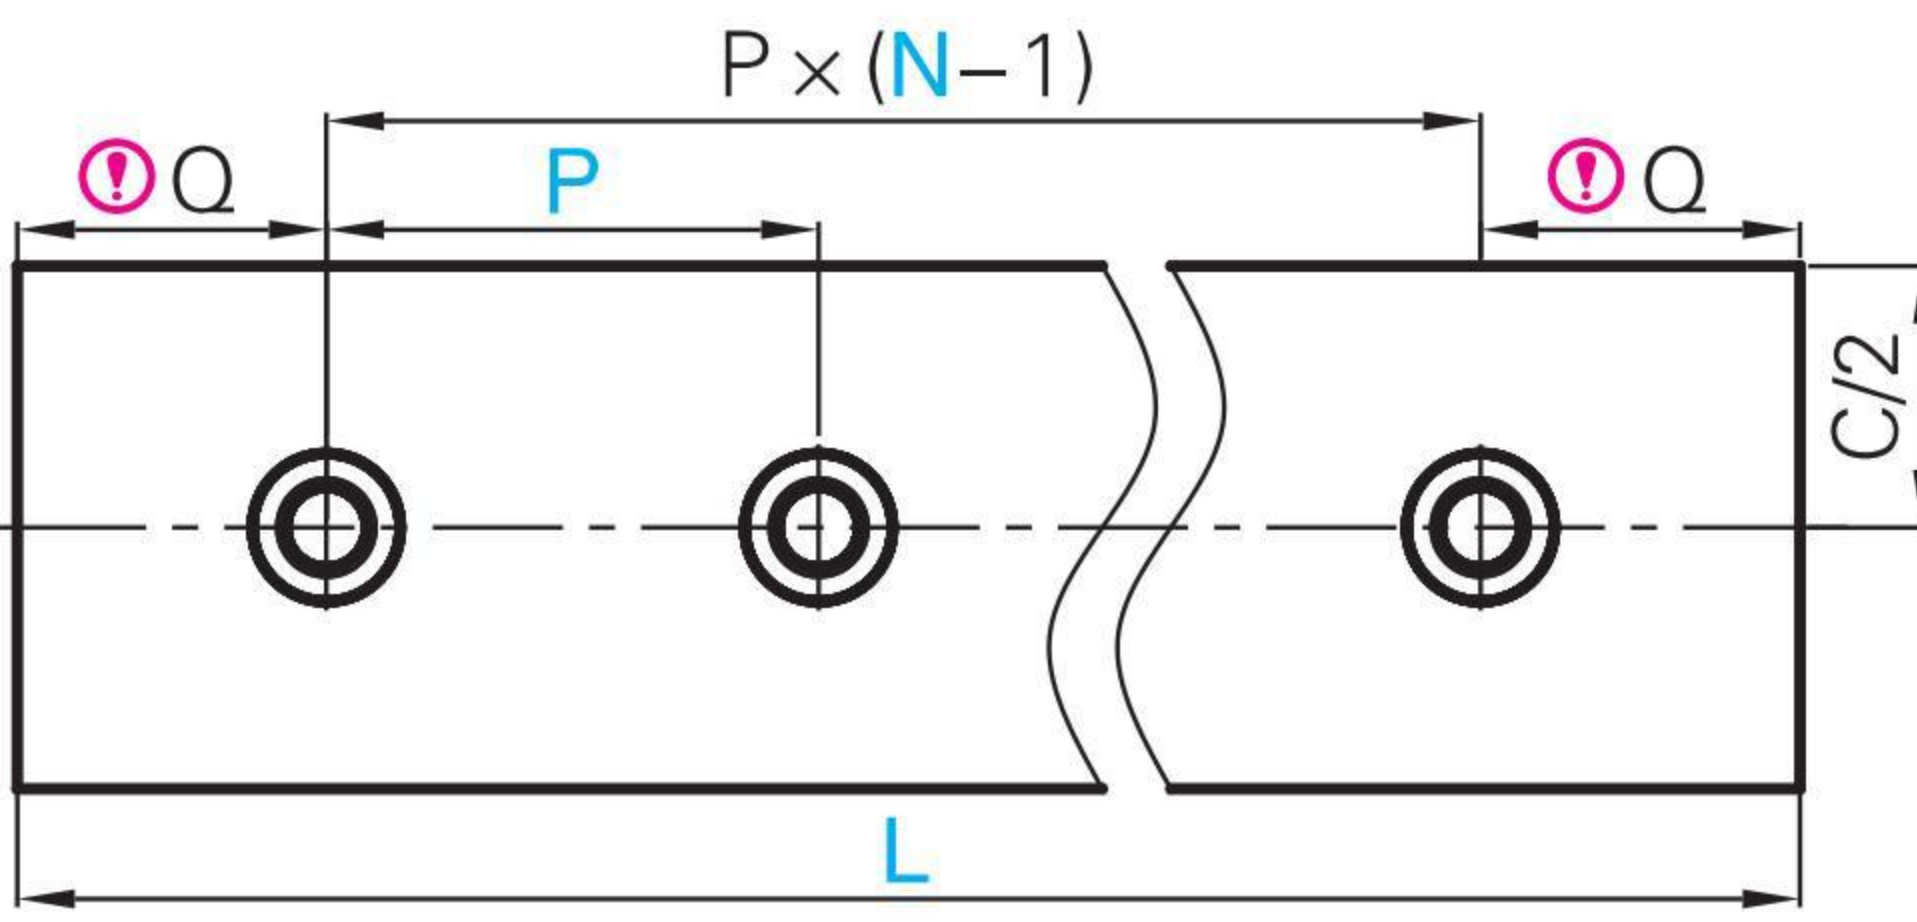
导轨

凹形



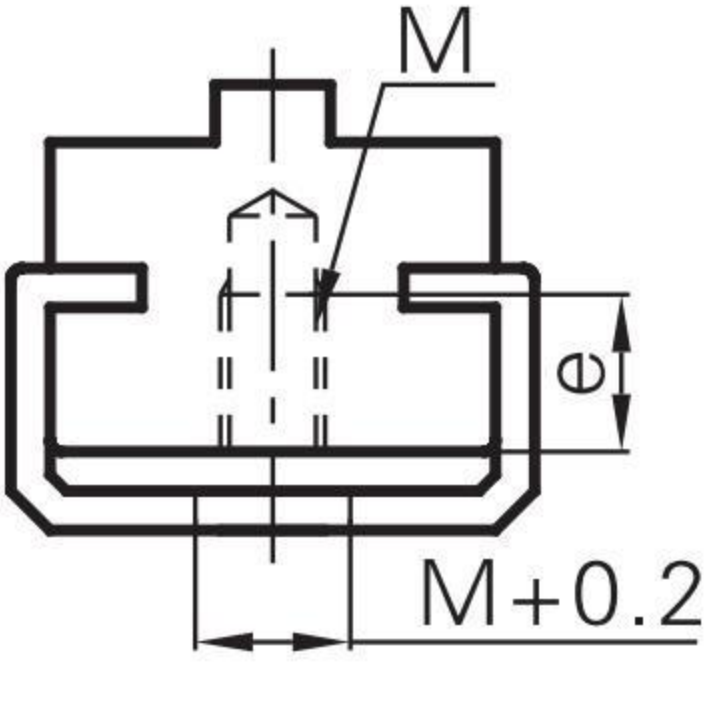
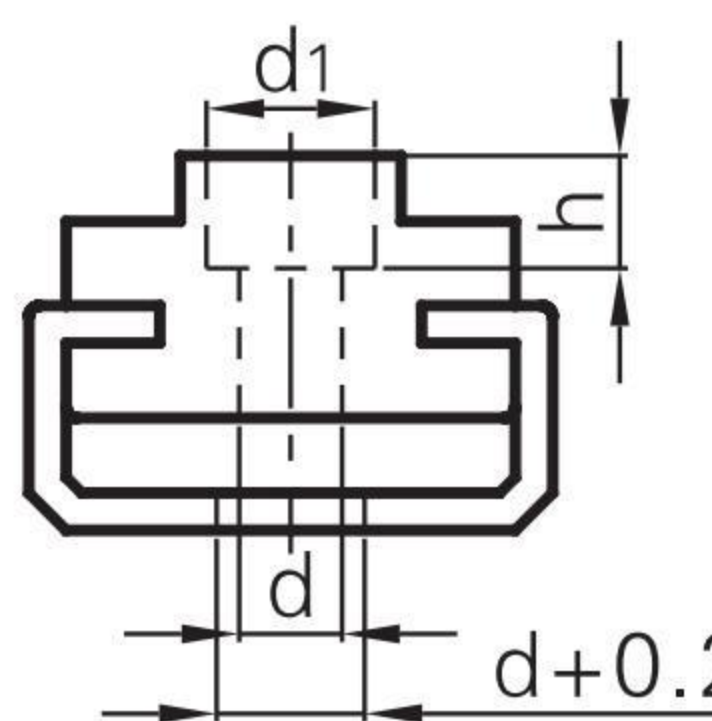
C型钢槽钢 t

导轨

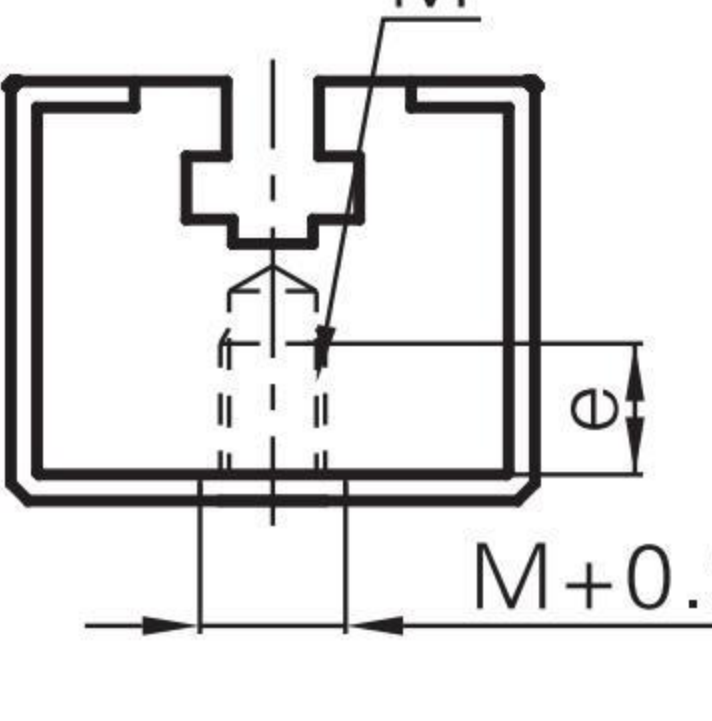
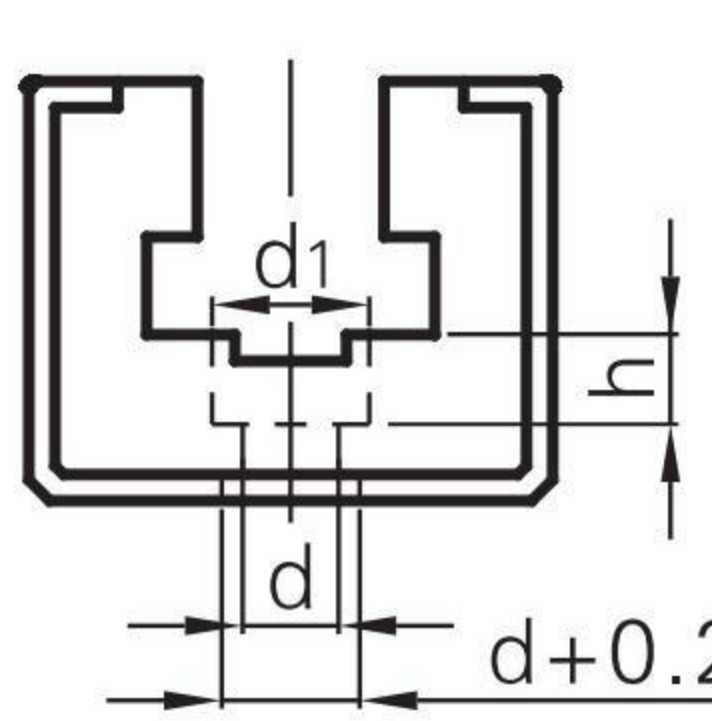


$Q = \frac{L - P(K-1)}{2} \geq 7$

凸形孔加工形状

规格35·40	规格50·60
	

凹形孔加工形状

规格35	规格40·50
	

L尺寸选择·无孔加工型

型式		L	A	B	C	D	E	F	G	H	t	重量 kg/m
型号	规格											
凸形 CGTC(钢) CGTS(不锈钢)	35	450 950 2000	4.4	2.3	20	17	14	17	10	10	1.5	0.67
	40		7.4	2.4								0.69
	50		8.8	2.8	28	20		24	14	12	2	0.69
	60		11.8	3.5								1.12
凹形 CGCC(钢) CGCS(不锈钢)	35	450 950 2000	4.6	4.3	30	24	5.3	9.9	7.9	9.3	1.5	1.46
	40		5.1	7.4			8.4	13.2	11.7	13.7		1.4
	50		6.4	8.9			10.7	16.5	14.5	16.2		1.34
	60		7.4	11.7			12.4	19.8	18.5	20.6		1.28

L尺寸指定·带孔加工型

型式		L 指定单位 10mm	K 孔数	P 孔距 指定单位 5mm	A	B	C	D	E	F	G	H	t	重量 kg/m
型号	规格													
凸形 CGLTC(钢) CGLTS(不锈钢)	35	200 ~ 2000	0 ~ 10 不可指定 孔数为1	50 ~ 500	4.4	2.3	20	17	14	17	10	10	1.5	0.67
	40				7.4	2.4								0.69
	50				8.8	2.8								0.69
	60				11.8	3.5	28	20		24	14	12	2	1.12
凹形 CGLCC(钢) CGLCS(不锈钢)	35	200 ~ 2000	0 ~ 10 不可指定 孔数为1	50 ~ 500	4.6	4.3	30	24	5.3	9.9	7.9	9.3	1.5	1.46
	40				5.1	7.4			8.3	13.2	11.7	13.7		1.4
	50				6.4	8.9			10.7	16.5	14.5	16.2		1.34
	60				7.4	11.7			12.4	19.8	18.5	20.6		1.28

- ① 孔数为0时无需选择P。
- ② 凹形规格60不适用于孔加工。
- ③ 超高分子量聚乙烯的伸缩率因温度而异，因此尺寸可能发生改变。

加工部尺寸

型式		M	e	d	d ₁	h
型号	规格					
凸形 CGLTC(钢) CGLTS(不锈钢)	35	M4	6	—	—	—
	40	M5	7.5	—	—	—
	50	—	—	4.5	7.5	5
	60	—	—	5.5	9	6
凹形 CGLCC(钢) CGLCS(不锈钢)	35	M6	9	—	—	—
	40	—	—	4.5	7.5	5
	50	—	—	5.5	9	6



订货范例
Order

型式 - L - K - P
CGTC35 - 450
CGLTC35 - 200 - K3 - P50



7 个工作日

链条导向件