

固定环
Shaft Collars


固定轴承用止动螺丝型・开口型
带内螺纹型・避空键槽型



固定轴承用止动螺丝型
带内螺纹型



型号		M 材质		S 表面处理	A 附件
细牙螺纹	粗牙螺纹	国标	相当		
FRGXMB	FRGYMB	45	S45C	四氧化三铁保护膜	2个止动螺丝(钢) 2个螺丝套件(铜合金)
FRGXMN	FRGYMN			无电解镀镍	2个止动螺丝(不锈钢) 2个螺丝套件(铜合金)
FRGXMS	FRGYMS	0Cr18Ni9	SUS304	—	

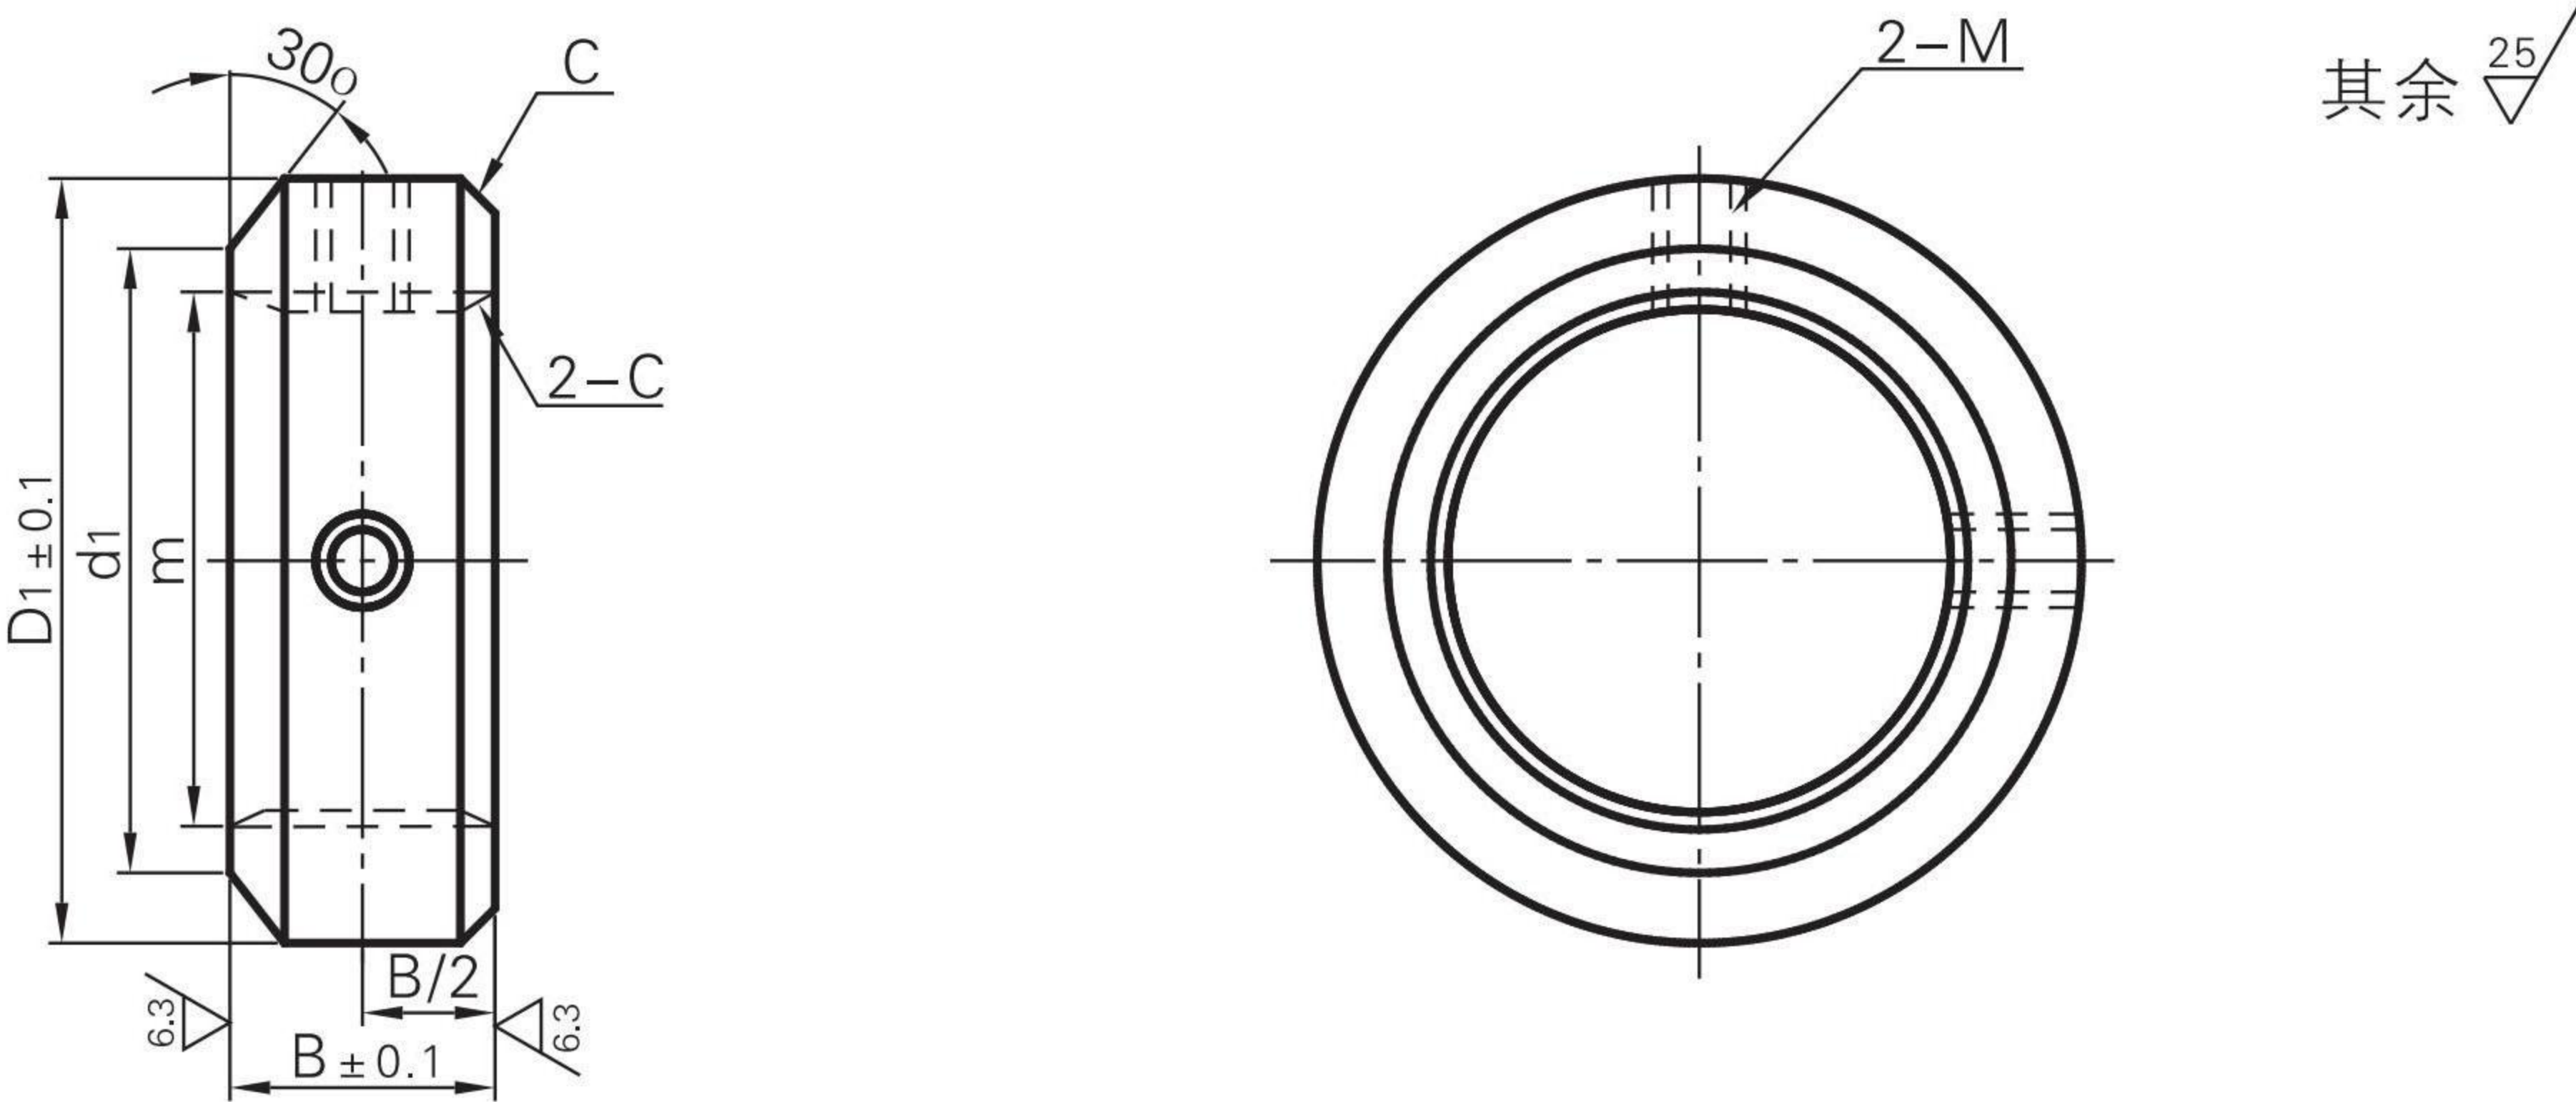

型式		B		m × 螺距		D ₁	d ₁	C	止动螺丝 M × 长度		
型号	No.	(细牙)	(粗牙)	(细牙)	(粗牙)						
(细牙螺纹型) FRGXMB FRGXMN FRGXMS	*3	6	—	M3 × 0.35	—	7	4.5	0.2	M3 × 3		
	4		6	M4 × 0.5	M4 × 0.7	8	5.5				
	5			M5 × 0.5	M5 × 0.8	11	10				
	6	8		10	M6 × 0.75	M6 × 1.0	12		11	M4 × 3	
	8		M8 × 0.75		M8 × 1.25	14	12				
	10		M10 × 0.75		M10 × 1.5	16	13				
(粗牙螺纹型) FRGYMB FRGYMN FRGYMS	*10A	10	—	M10 × 1.0	—	20	15	0.5	M5 × 4		
	12		10	M12 × 1.0	M12 × 1.75						
	*15		—	M15 × 1.0	—					24	20
	16		12	M16 × 1.0	M16 × 2.0				26	22	M6 × 5
	20			M20 × 1.0	M20 × 2.5				32	27	
	*25		12	—	M25 × 1.5				—	38	31
	30	15	15	M30 × 1.5	M30 × 3.5	46	38	1	M8 × 6		

① 带*符号的No.仅细牙型适用



订货范例
Order
型式
FRGXMB3




7 个工作日

开口型
避空键槽型



型号	M 材质		S 表面处理	A 附件 (内六角螺栓)
	国标	相当		
FRHKB	45	S45C	四氧化三铁保护膜	1个(钢)
FRHKN			无电解镀镍	1个(不锈钢)

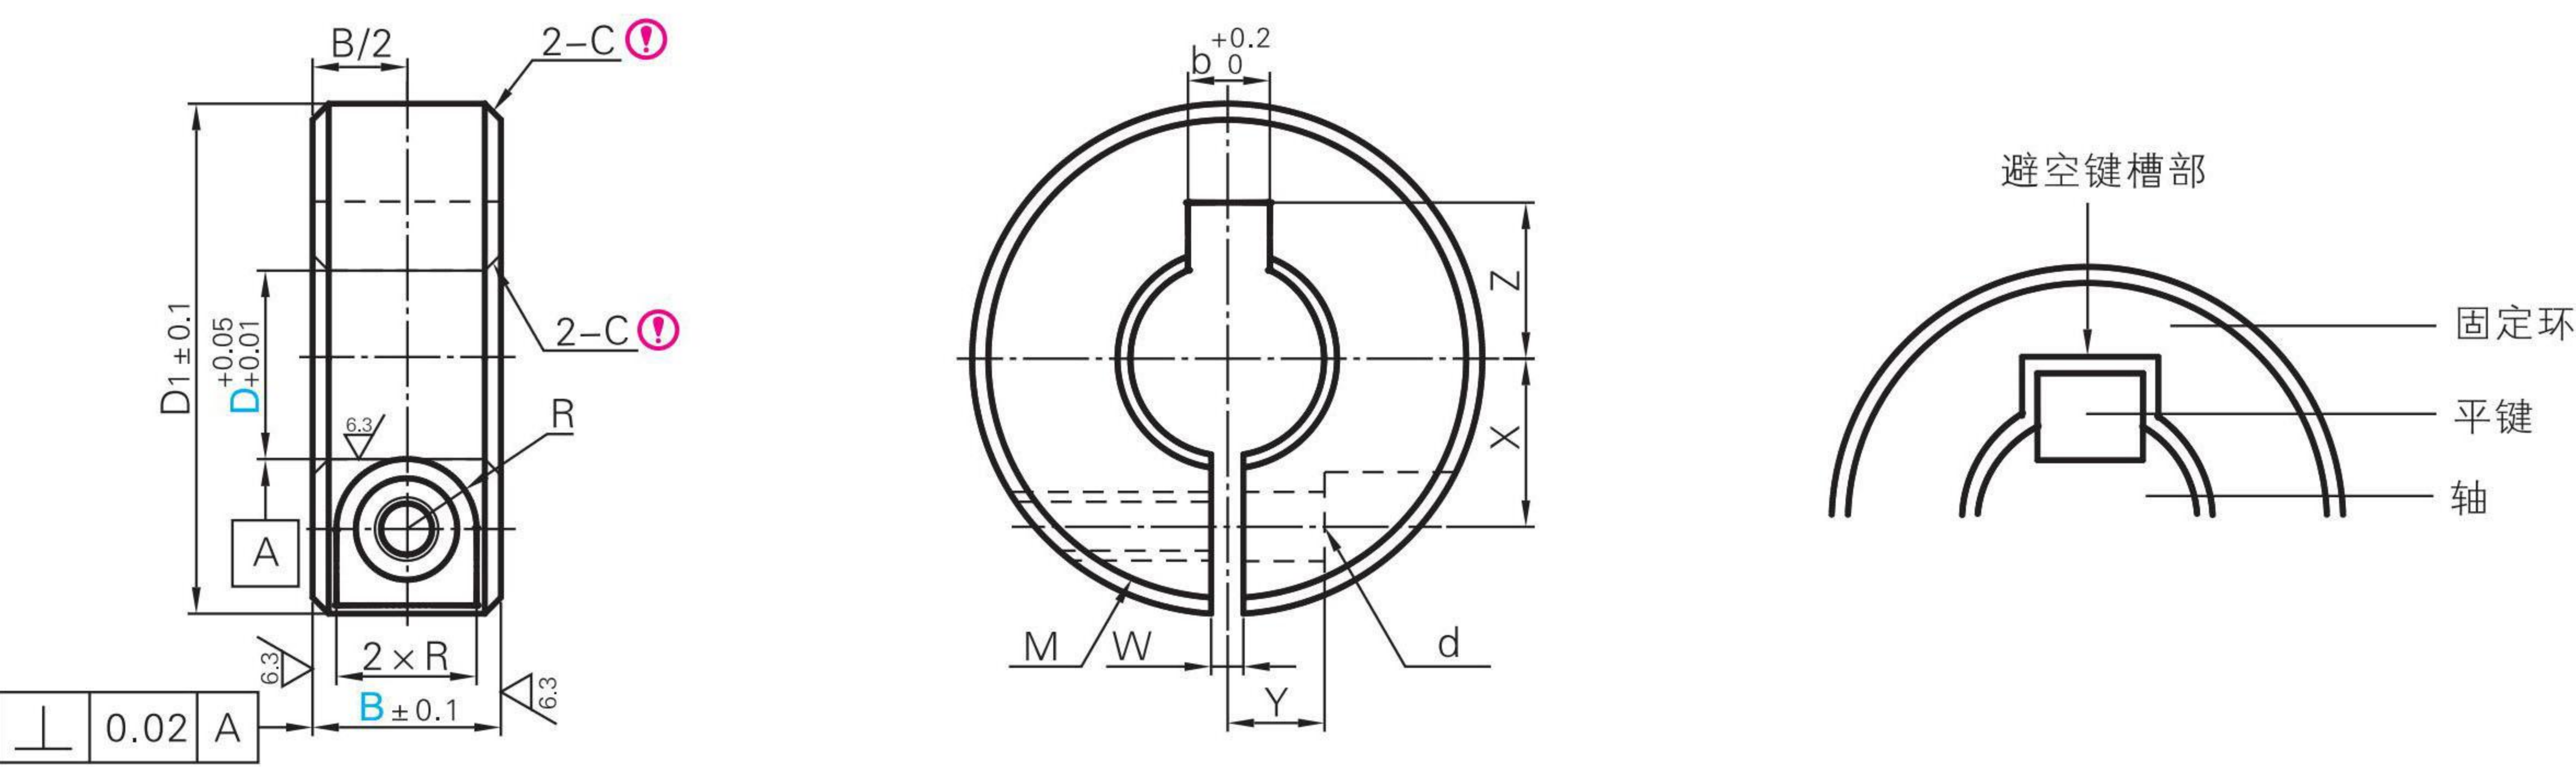

+0.05
① D+0.01 为开口加工前的公差。

① D10~D25:C0.5
D30:C1

型式		B 选择	D ₁	M (粗牙)	d	R	W	X	Y	Z	b		
型号	D												
FRHKB FRHKN	10	10	30	M4	4.5	3.75	1.5	9	5	7	3.5		
		12		M5	5.5	4.5		10				6	
		15		M6	6.6	6							
	12	10	30	M4	4.5	3.75		11	5	8.5	4.5		
		12		M5	5.5	4.5						11.5	6
		15		M6	6.6	6			12				8
	15	10	34	M4	4.5	3.75		13	6	10.5	5.5		
		12		M5	5.5	4.5							
		15	40	M6	6.6	6						14	7
	20	M5		5.5	4.5	15		8					
	20	12	45	M6	6.6	6		17	10	16.5	8.5		
		15		M5	5.5	4.5						18	19
		30		15	55	M6							

① b部槽不是键固定槽，而是键避空槽。



订货范例
Order
型式
FRHKB10

—

B

—

10



7 个工作日