

固定环
Shaft Collars

开口型
紧凑型·双/三沉孔固定型





CAD 2D 3D

Table with 4 columns: Model, Material (M), Surface Treatment (S), and Accessories (A). Rows include FRBCB, FRBCN, and FRBCS models with their respective materials (45, 0Cr18Ni9), surface treatments (passive film, electroless nickel), and accessories (locking screws).

其余 25/

+0.05
D+0.01 为开口加工前的公差。

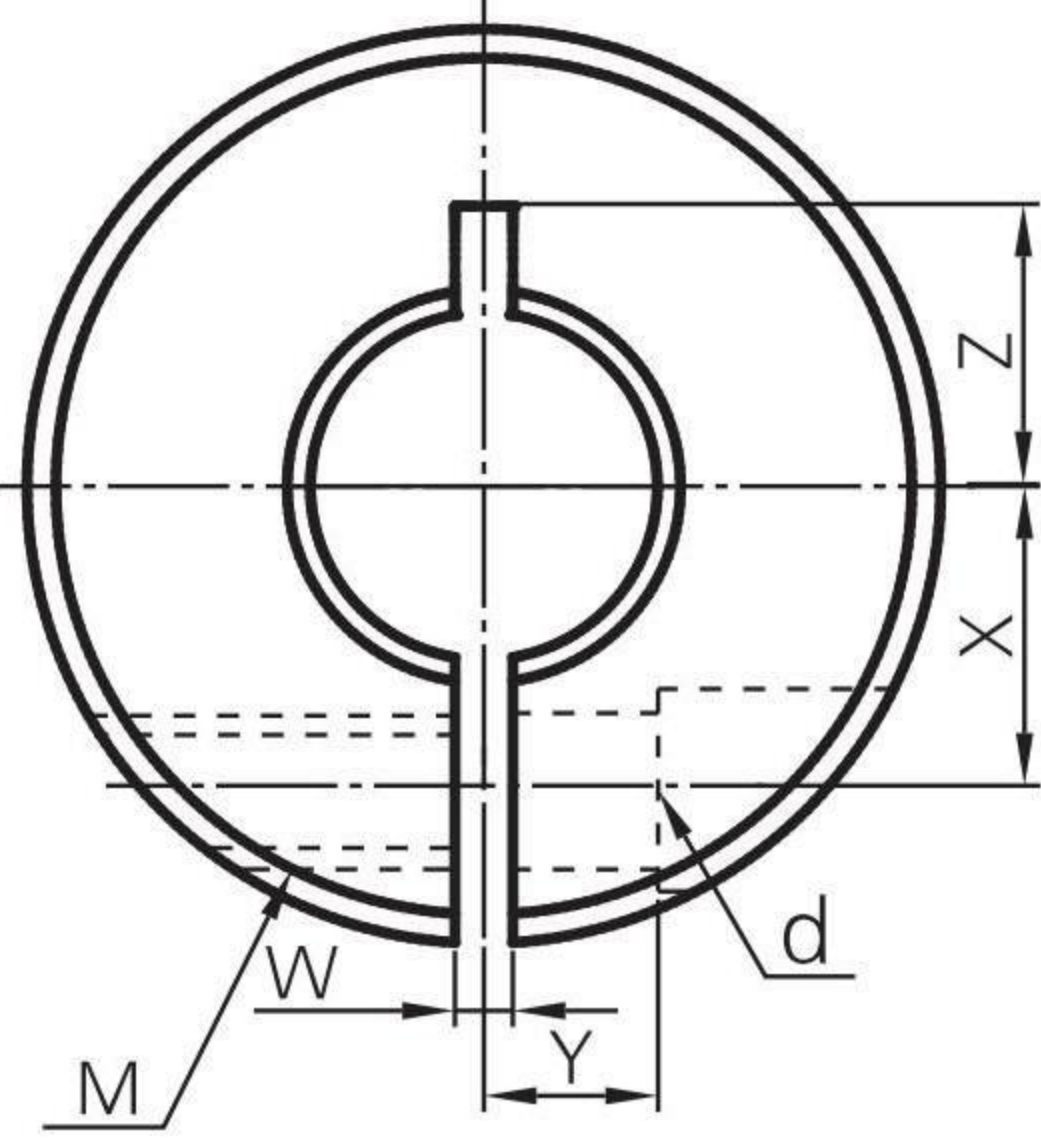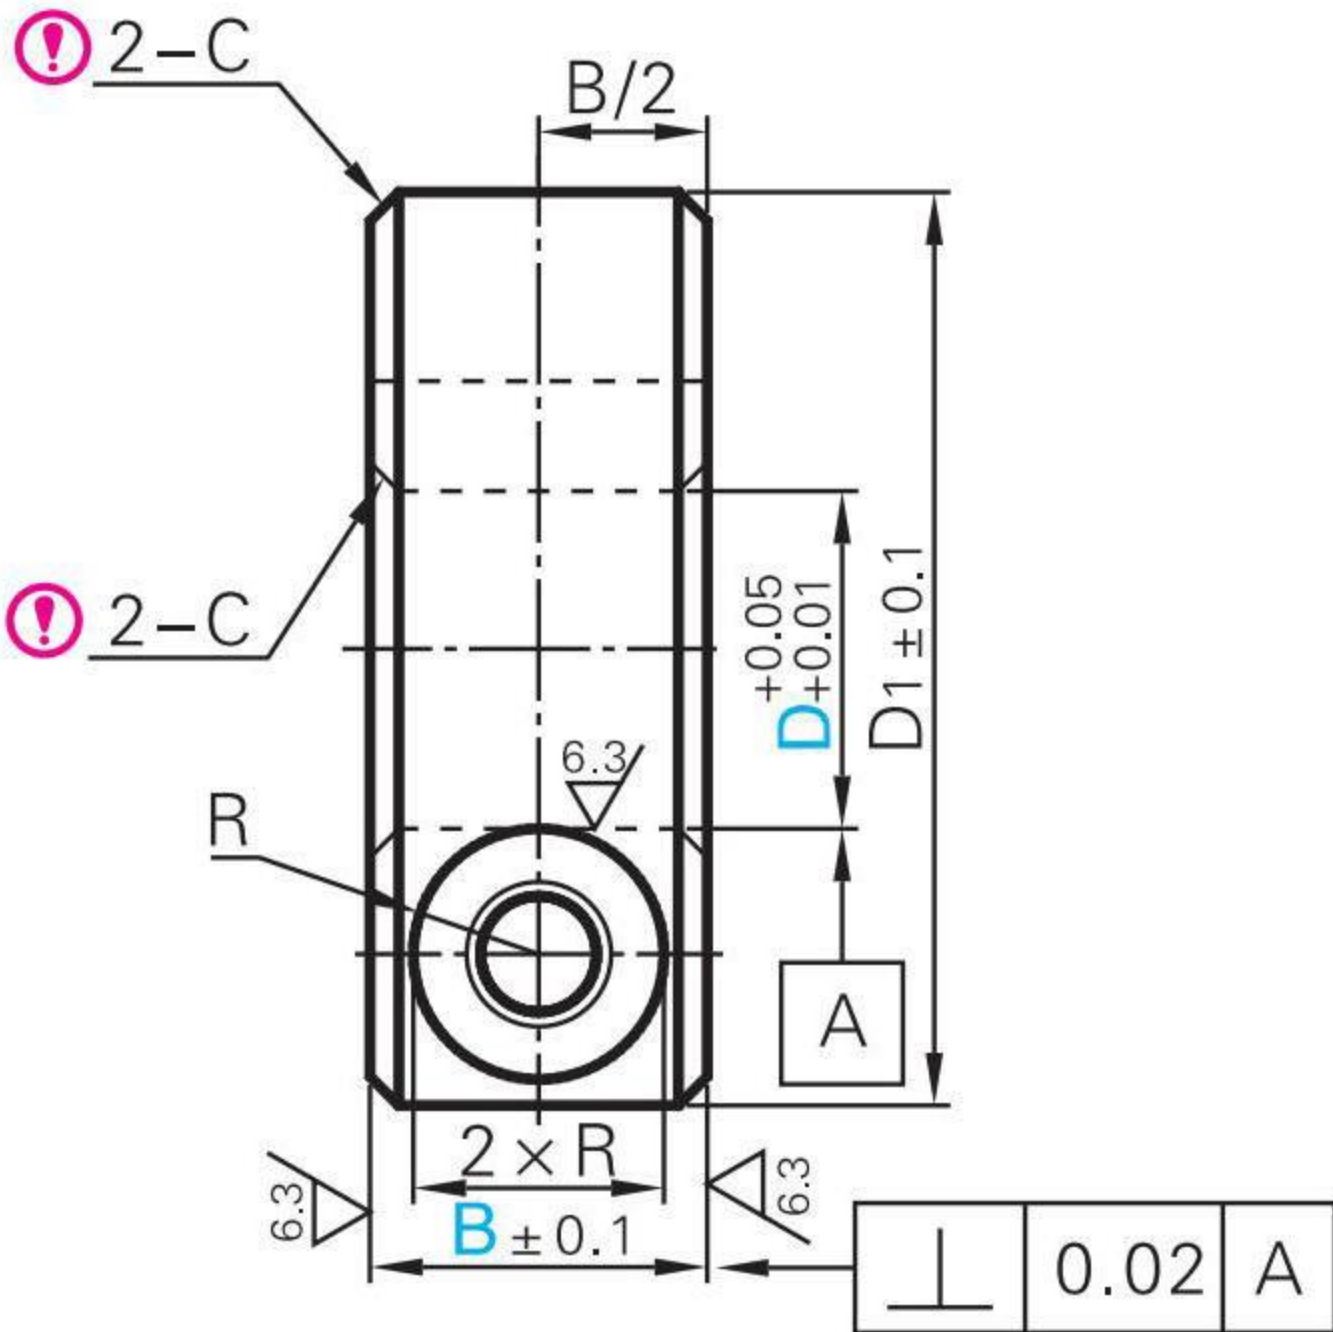

D 5~D25:C0.5
D30~D50:C1

Large table with 11 columns: Model, D, B, D1, M (Thread), d, R, W, X, Y, Z. It lists various compact type shaft collar models and their dimensions.

Ordering example: FRBCB5 - 6, 5 working days.







CAD 2D 3D

Table with 6 columns: Model, Material (M), Surface Treatment (S), and Accessories (A). Rows include FRBDSB, FRBDSN, FRBDSS, FRBTSB, FRBTSN, and FRBTSS models.

其余 25/

+0.05
D+0.01 为开口加工前的公差。

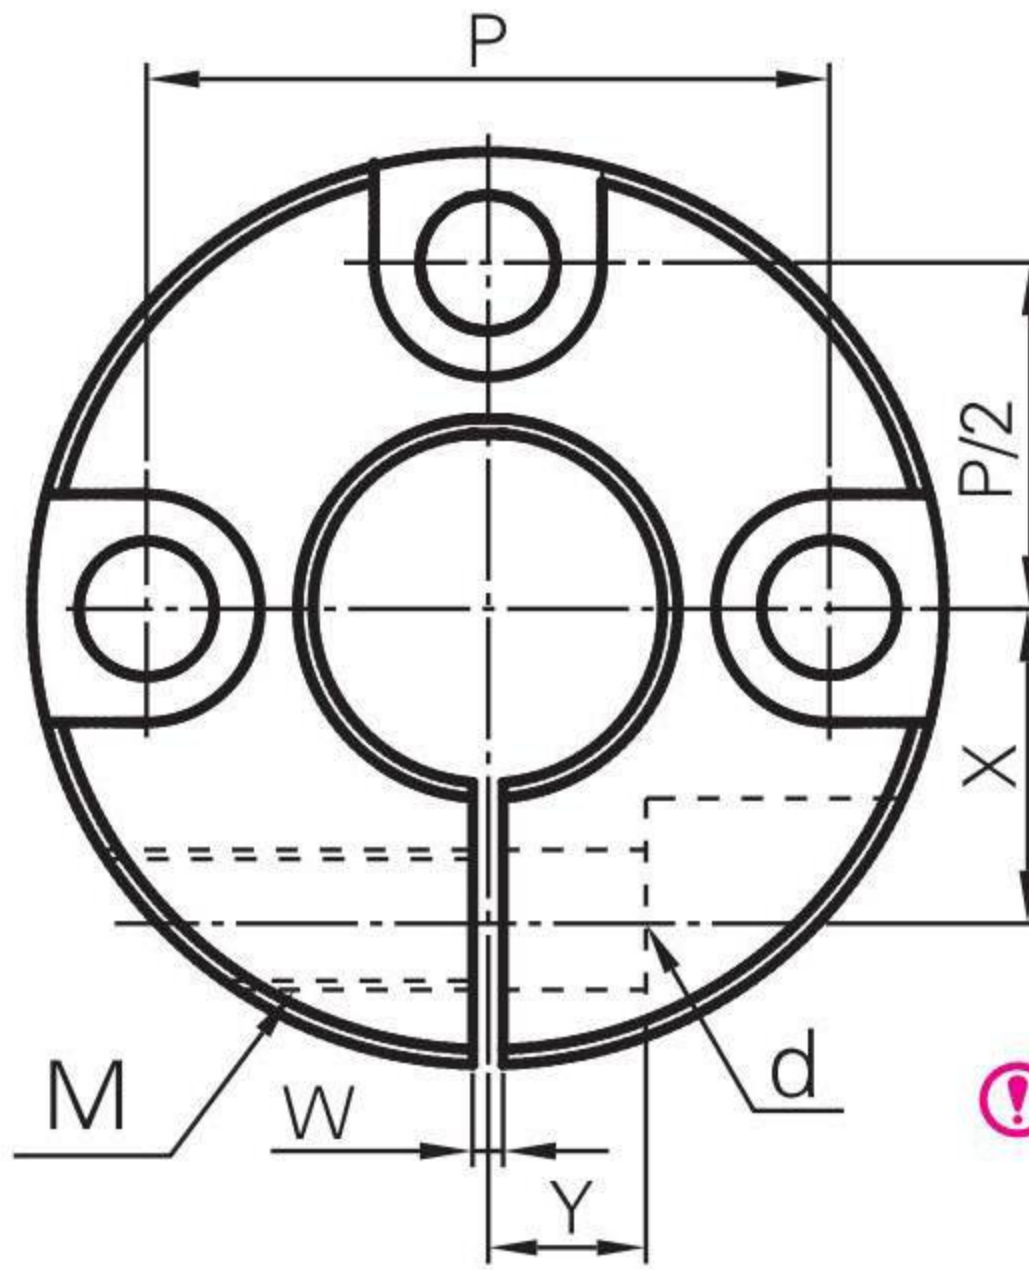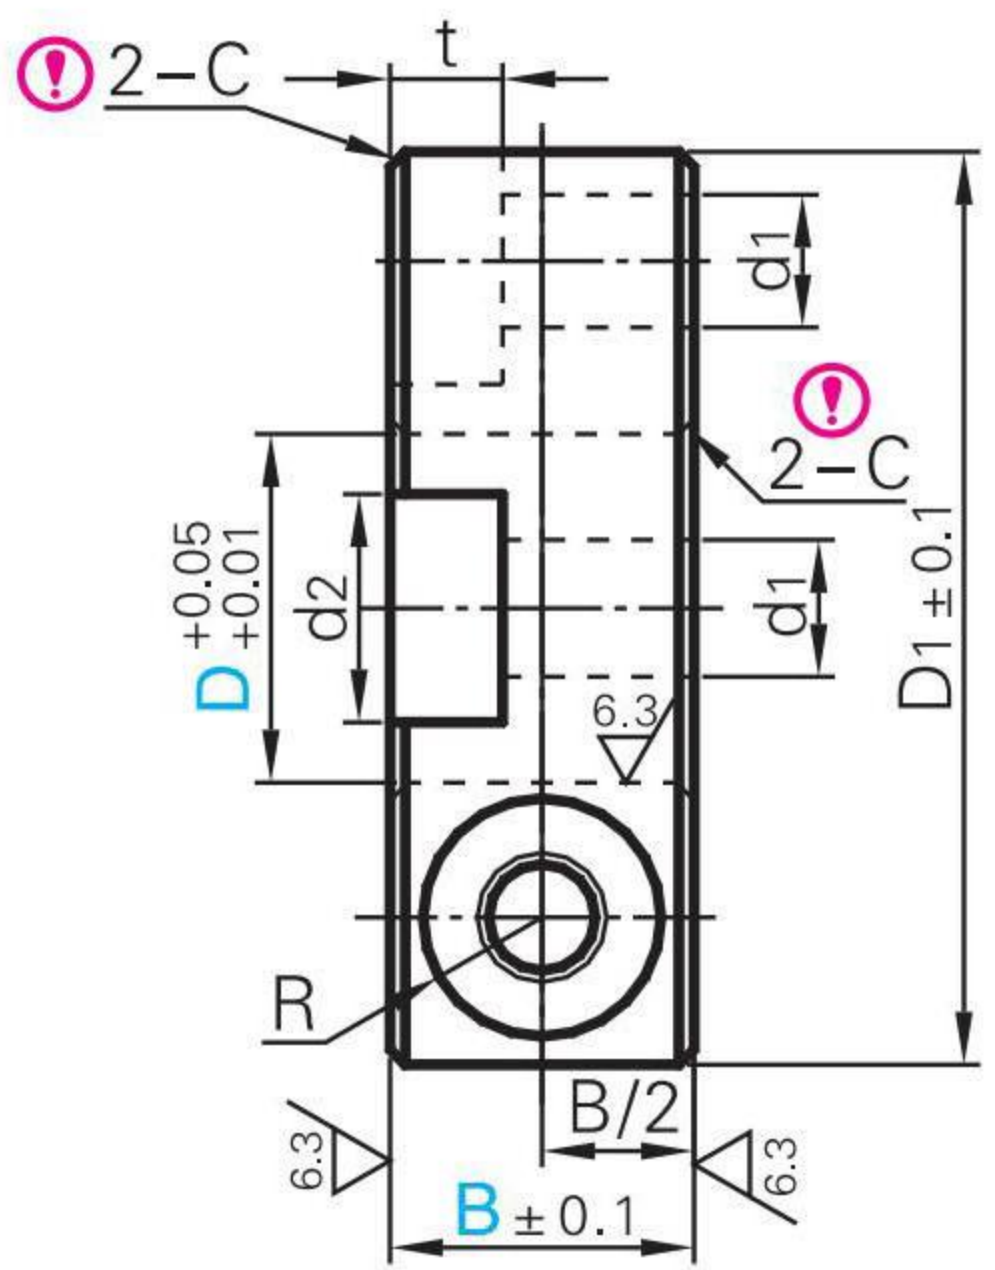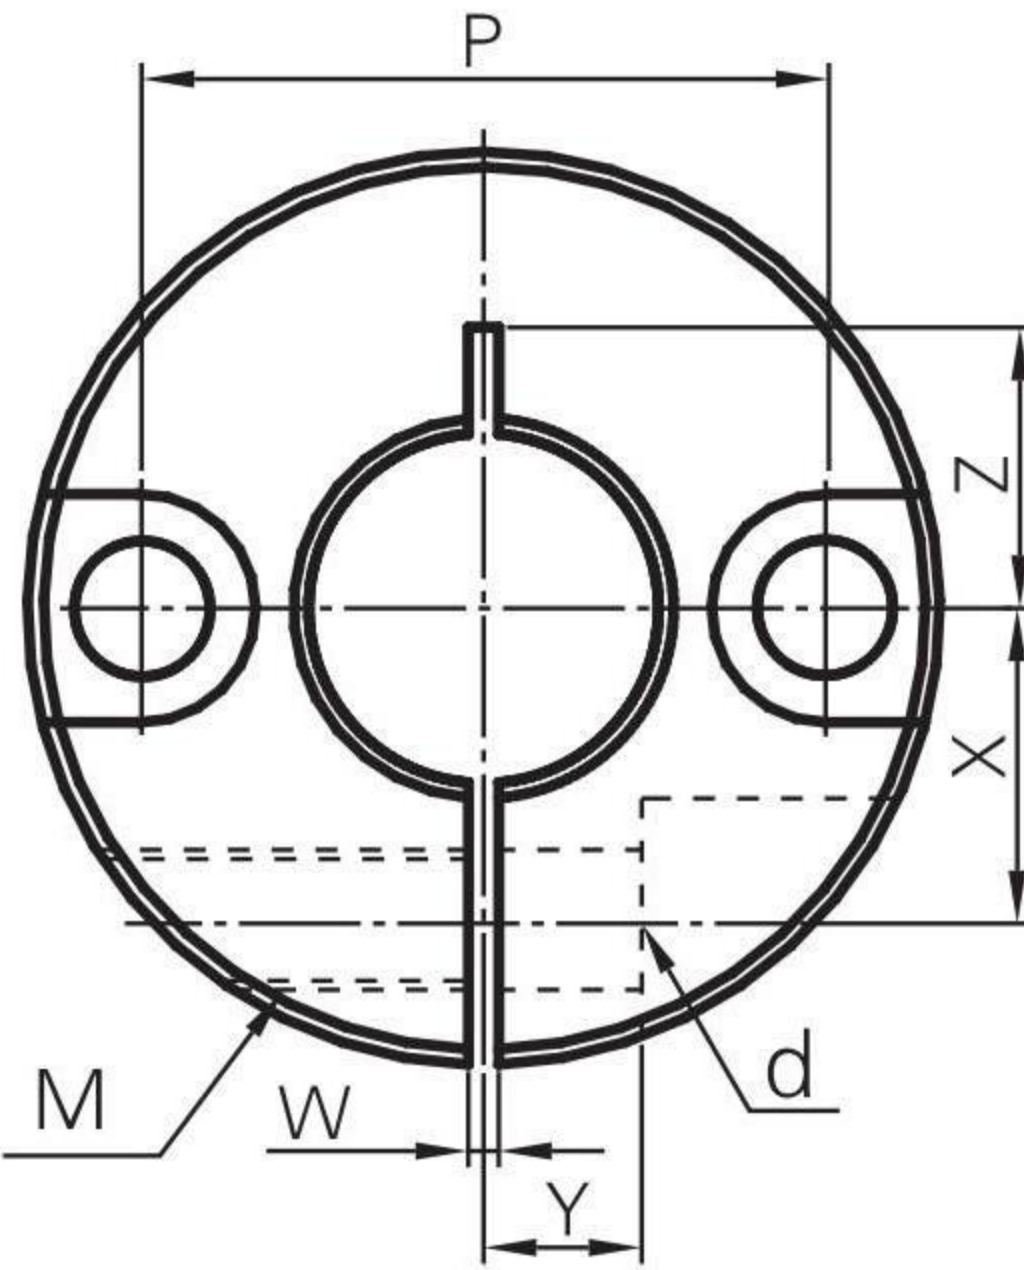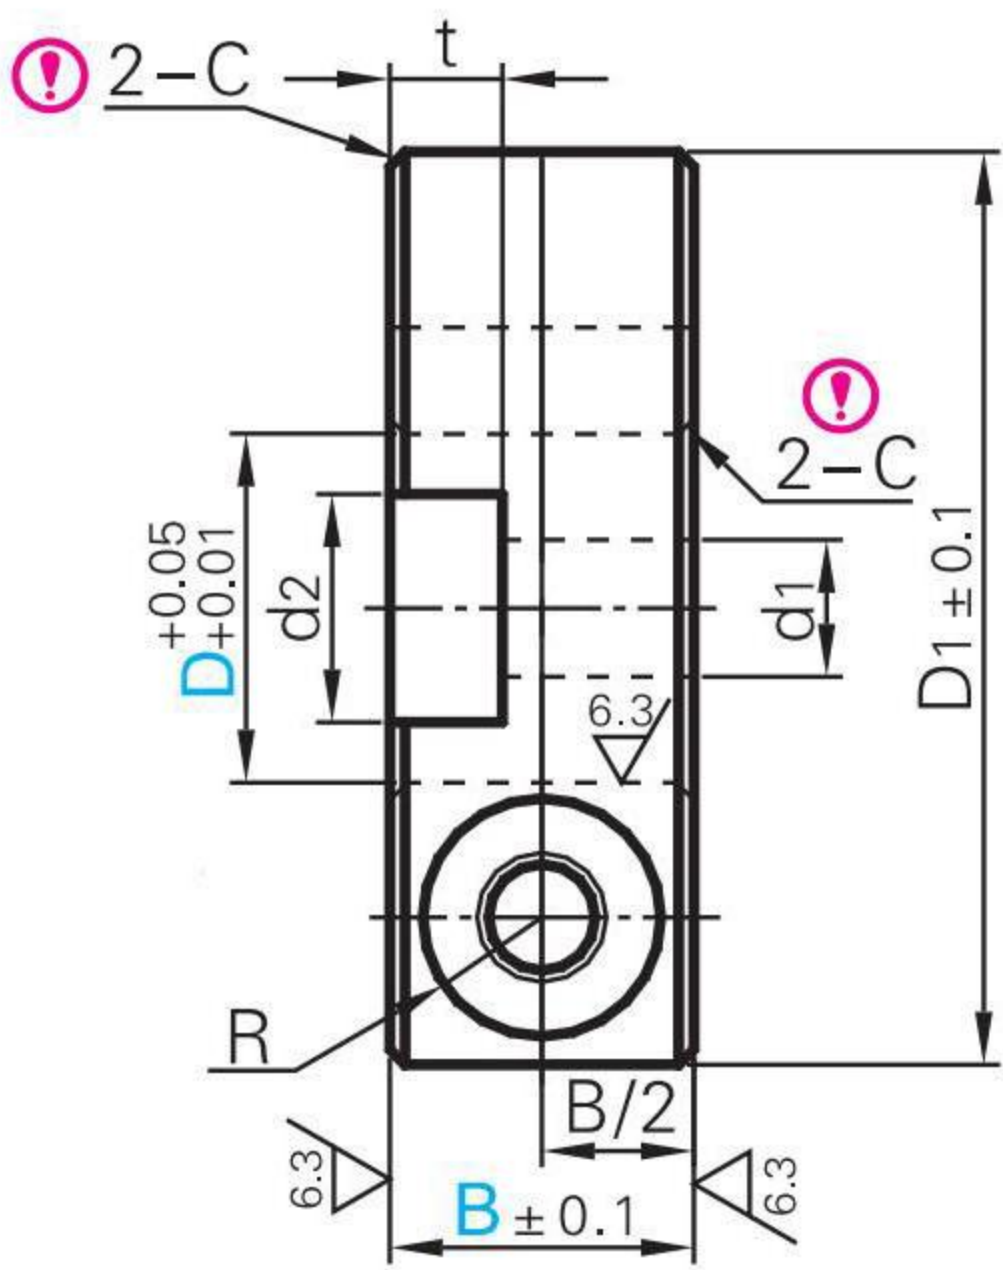

D 6~25:C0.5
D 30~50:C1

D 6~25:C0.5
D 30~50:C1

Large table with 14 columns: Model, D, B (Selection), D1, M (Thread), d, R, W, X, Y, Z, P, d1, d2, t. It lists various double and triple hole fixed type shaft collar models and their dimensions.

① 三孔固定型仅有带*符号的尺寸
② 三孔固定型由于开口的相反侧(紧固部的相反侧)未进行开口加工，导向轴的紧固力较小。在需要导向轴联接的保持力时，建议使用双孔固定型。

Ordering example: FRBDSB6 - 8, 5 working days.

固定环