





开口型



型号	M 材质		S 表面处理	A 附件 (内六角螺栓)
	国标	相当		
FRKGB	45	S45C	四氧化三铁保护膜	1个(钢)
FRKGN			无电解镀镍	1个
FRKGS	0Cr18Ni9	SUS304	—	(不锈钢)

① $D^{+0.05}_{+0.01}$ 为开口加工前的公差。

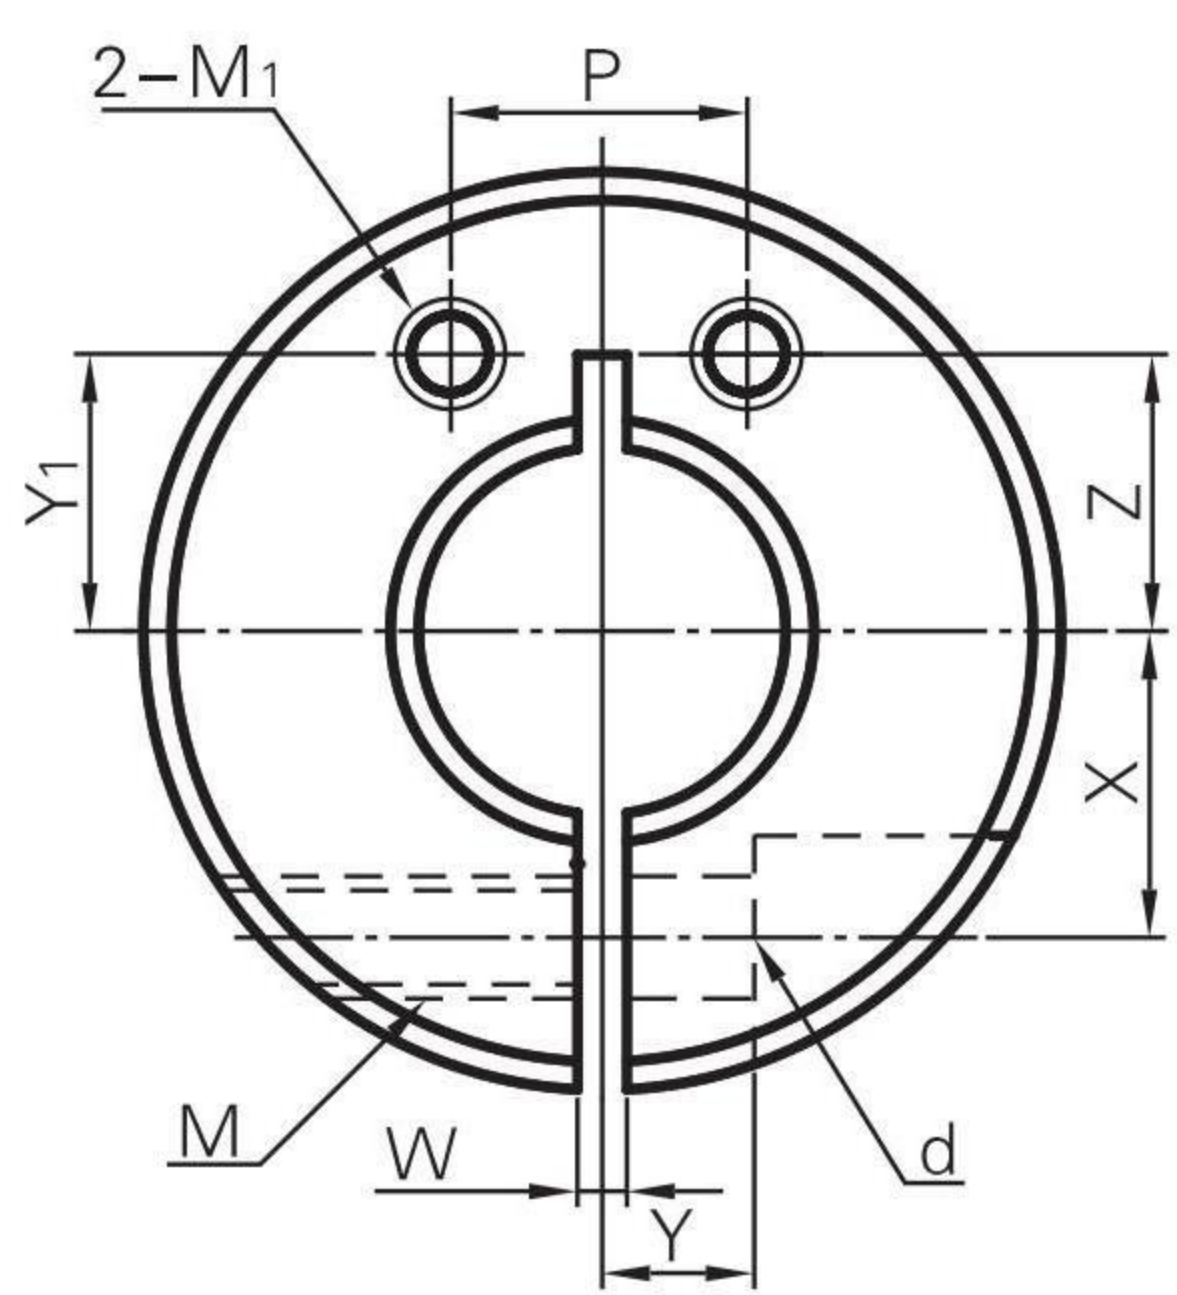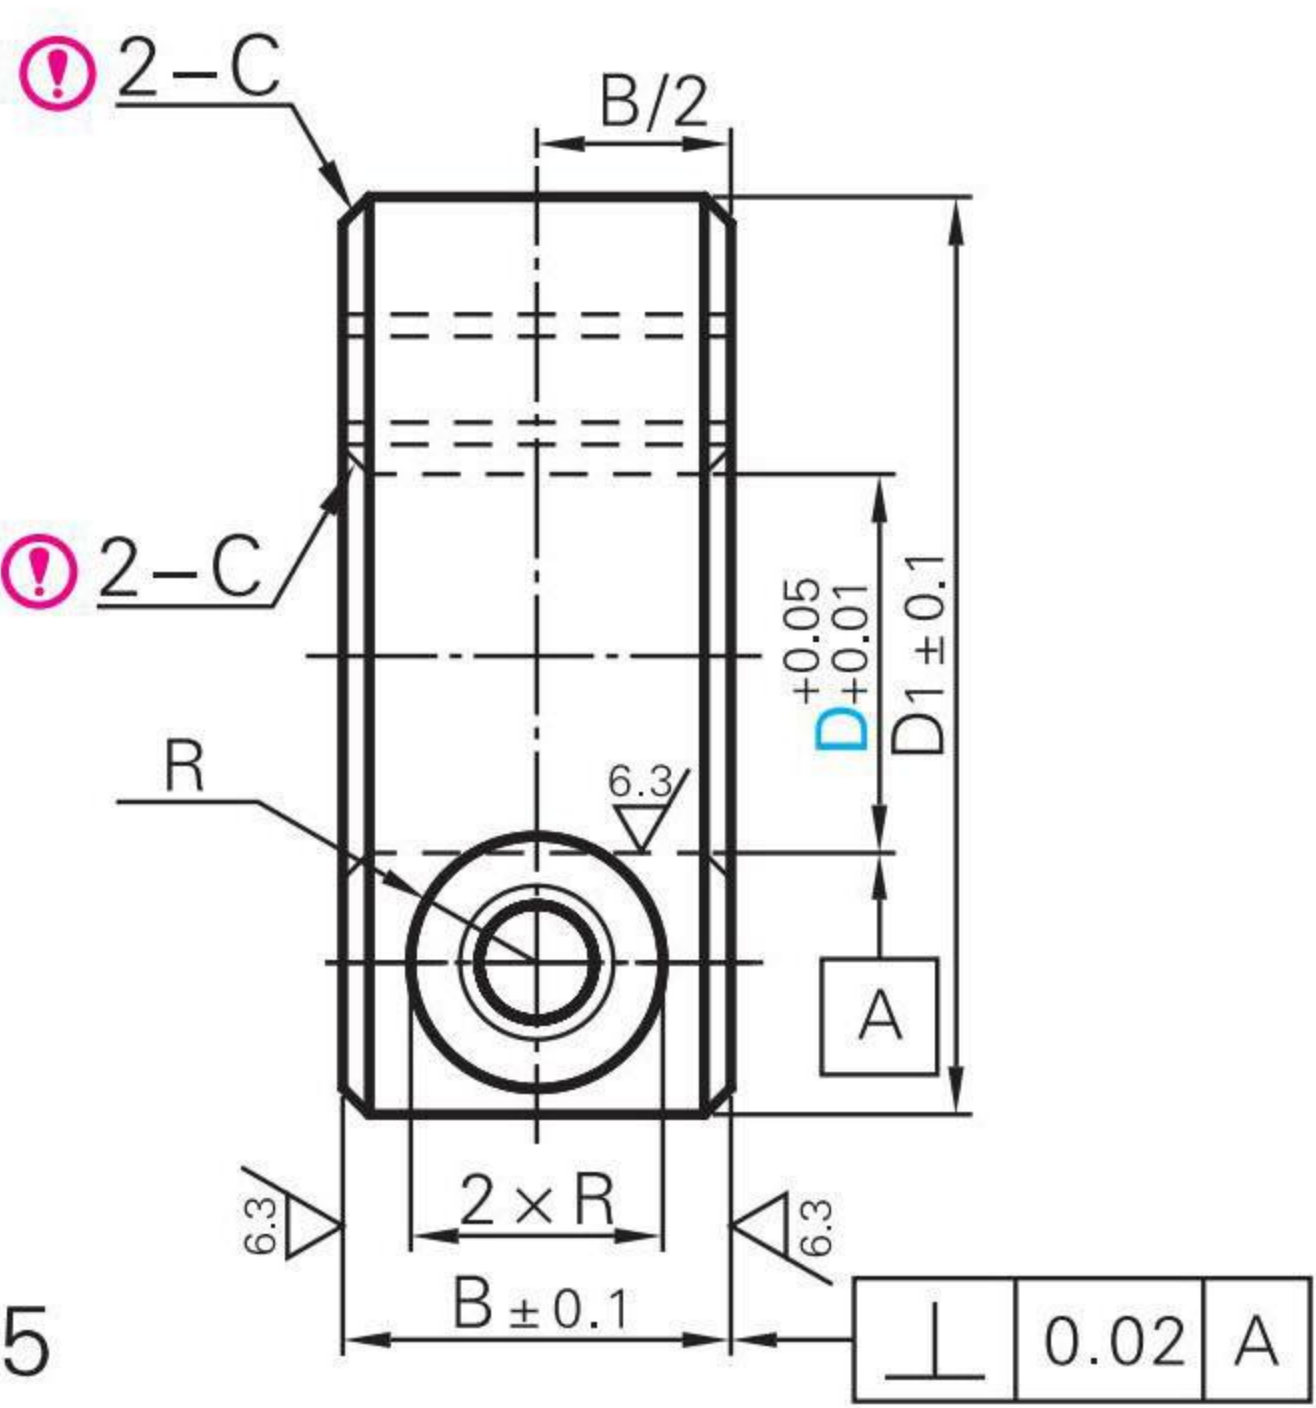



其余 $\sqrt{25}$

① D8~D25:C0.5
D30:C1

分离型



型号	M 材质		S 表面处理	A 附件 (内六角螺栓)
	国标	相当		
FRKEB	45	S45C	四氧化三铁保护膜	2个(钢)
FRKEN			无电解镀镍	2个
FRKES	0Cr18Ni9	SUS304	—	(不锈钢)

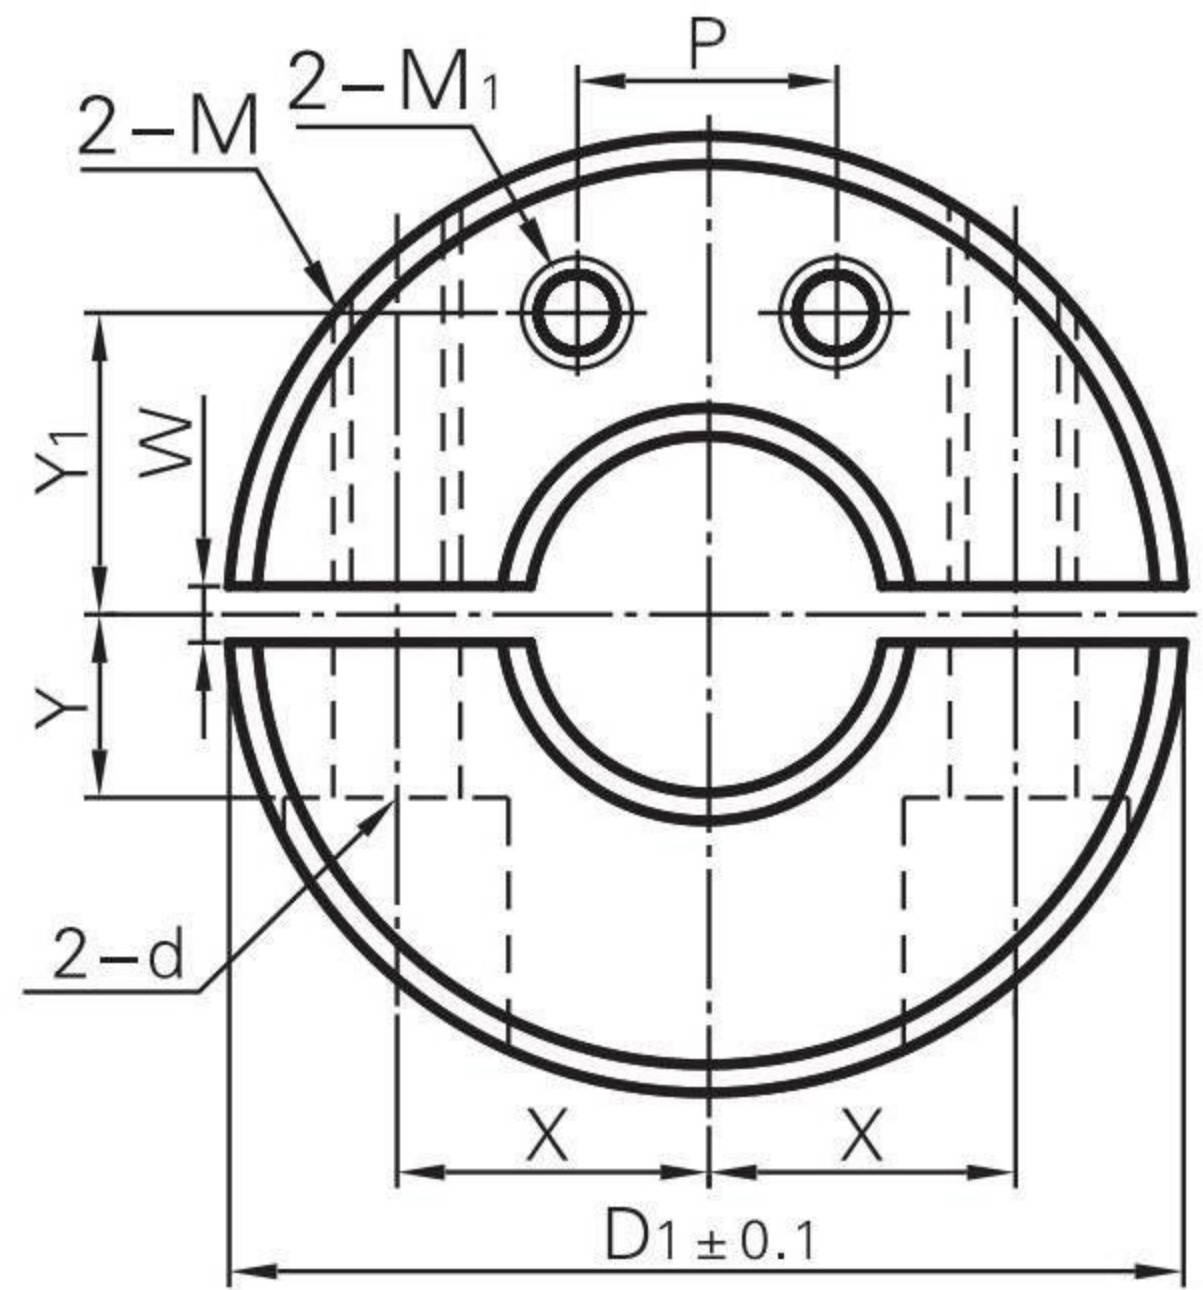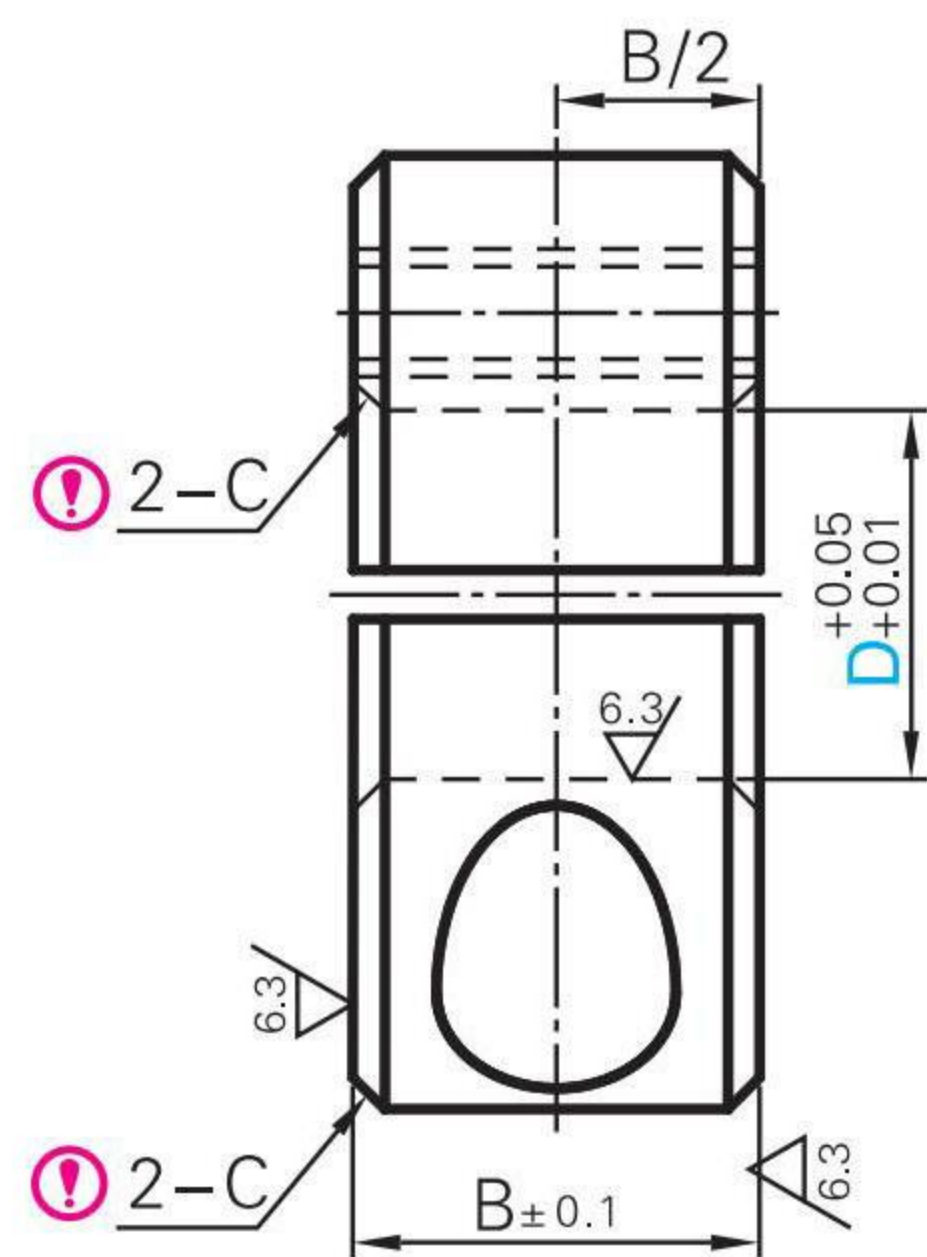

其余 $\sqrt{25}$

① D8~D25:C0.5
D30:C1

型式		B	D ₁	M (粗牙)	d	R	W	X	Y	Z	M ₁ (粗牙)	Y ₁	P																															
型号	D																																											
(开口型)	8	10	25	M4	4.5	3.75	1.5	8	5	7 ~ 9	M3	8	8																															
	10		30					9		8 ~ 10	M4	10	10																															
	12							10		9 ~ 10																																		
	FRKGB 13		34					11.5	6	10 ~ 12	M5	12	12 *(14)																															
	FRKGN 15													35	12	11 ~ 12	M4	14	14																									
FRKGS 15A	M5			5.5	4.5	14														7	13	M5	17	16																				
16			12					45	M6	6.6	6	20	10	18 ~ 20	M6	20	20																											
(分离型) 16A																		12	45						M6	6.6	6	20	10	18 ~ 20	M6	20	20											
FRKEB 20A																																		12	45	M6	6.6	6	20	10	18 ~ 20	M6	20	20
FRKEN 20																																												
FRKES 25	12	45		M6	6.6	6	20													10	18 ~ 20	M6	20	20																				
25A			12					45	M6	6.6	6	20	10	18 ~ 20	M6	20	20																											
30																		12	45						M6	6.6	6	20	10	18 ~ 20	M6	20	20											

① 请按照交货时的装配方向组合使用。② ()仅分离型D20A时，P尺寸为14。



订货范例
Order

型式

FRKGB8



7

个工作日