

直杆定位销

Dowel Pins Straight Type

正公差

NEW
新产品
绿色字体规格


一端螺纹
通气槽型




型号	D公差	M 材质		H 硬度
		国标	相当	
DPT	p6	GCr15	SUJ2	45 ~ 50HRC
DPTM	m6	9Cr18	SUS440C	
DPTMS				

- ① D5、D6的L尺寸为10时，螺纹底孔可能会贯通。
- ② 仅D=6、L=10时，e=6
- ③ e1、e2尺寸可能会因外径研磨加工而大于产品目录中的值。

DPT



DPTM
DPTMS

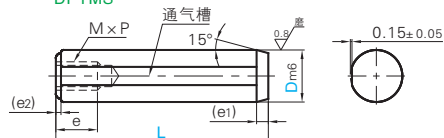

CAD 2D 3D

型式	型号	D	L										e1	e2	M x P	e	Dp6
DPT (p6型)	5	10	15	20	25	30							1.5	0.5	3×0.5	6	+0.020
	6	10	15	20	25	30	35	40		50			2		4×0.7	8	+0.012
	8		15	20	25	30	35	40	45	50	60	70	80		5×0.8		+0.024
	10		15	20	25	30	35	40	45	50	60	70	80		6×1.0	10	+0.015
	12			20		30		40		50	60	70	80	2.5			+0.029
	13							40		50	60	70	80	1	8×1.25	15	+0.018
	16							40		50	60	70	80				
	20									50	60	70	80	3	10×1.5	18	+0.035 +0.022

型式	型号	D	L										e1	e2	M x P	e	Dm6
DPTM (m6型)	5	10	15	20	25	30							1.5	0.3	3×0.5	6	+0.012
	6	10	15	20	25	30	35	40		50			2		4×0.7	8	+0.004
	8		15	20	25	30	35	40	45	50	60	70	80		5×0.8		+0.015
	10		15	20	25	30	35	40	45	50	60	70	80		6×1.0	10	+0.006
	12			20		30		40		50	60	70	80	2.5			+0.018
	13							40		50	60	70	80	1	8×1.25	15	+0.007
	16							40		50	60	70	80				
	20									50	60	70	80	3	10×1.5	18	+0.021 +0.008

型式		L										e ₁	e ₂	M × P	e	D _{m6}
型号	D															
DPTMS (m6型)	5	10	15	20							1.5	0.3	3 × 0.5	6	+0.012	
	6	10	15	20	25	30					4 × 0.7			+0.004		
	8		15	20	25	30	35	40			2	0.5	5 × 0.8	8	+0.015	
	10			20	25	30	35				6 × 1.0			+0.006		



订货范例
Order

型式 - L
DPT5 - 10




3 个工作日

一端螺纹锥型



型号	M 材质		H 硬度
	国标	相当	
DPTT	T10	SK4	45~50HRC



型式	型号	D	L										M x P	e
DPTT	8		22	30	40								5×0.8	9
	10		25	30	35	40	45	50	55	60	65	70	6×1.0	10
	12				40	45	50	55					8×1.25	14
	13						50	60					10×1.5	16
	16							60	70					



订货范例
Order

型式 - L
DPTT8 - 30



3 个工作日

L增加新规格