

旋转吊环螺栓

Screwable Lifting Points

起重型

NEW

新产品

绿色字体型号

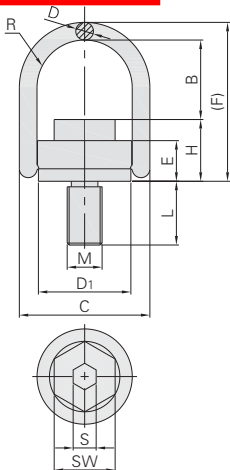
起重型



CAD 2D 3D

型号	材质	表面处理
SLPH	合金钢	烤漆

①因烤漆工艺,可能会导致产品吊装处部分区域未能烤漆。



■特点:

- 可360° 旋转, 180° 翻转。
- 环体可随力的方向旋转, 以调整受力角度。
- 不同受力方向, 可吊起载荷不同, 但保证4倍安全系数。
- 安装便捷。被吊物仅需一个螺栓孔, 可用开口/套头扳手或内六角扳手安装使用, 外六角+内六角设计安装方便快捷。
- 螺纹规格齐全, 额定载荷范围广。

适用受力范围: 180°






可360° 旋转

型式		螺纹MxP	D ₁	B	H	D	L	(F)	C	E	R	S	SW	锁紧扭矩(Nm)	净重(kg)
型号	No.														
SLPH	8	M 8x1.25	33	42	28	11	12	80	58	23	17	6	13	30	0.3
	10	M10x1.5	33	41	29	11	15	80	58	23	17	6	17	60	0.3
	12	M12x1.75	33	40	31	11	20	80	58	23	17	8	19	100	0.3
	14	M14x2.0	50	56	45	17	21	117	90	36	27	10	22	120	0.9
	16	M16x2.0	50	54	46	17	24	117	90	36	27	10	24	150	0.9
	18	M18x2.5	65	78	57	20	26	153	108	44	34	12	30	200	1.9
	20	M20x2.5	50	52	49	17	30	117	90	36	27	12	30	250	1.0
	24	M24x3.0	72	81	59	25	36	163	125	44	37	14	36	400	2.6
	30	M30x3.5	87	94	81	30	48	204	148	62	46	17	46	500	5.0
	36	M36x4.0	110	112	98	36	54	247	188	75	57	22	55	1000	9.6
	42	M42x4.5	110	101	108	36	63	247	188	83	57	24	65	1500	10.9
	48	M48x5.0	110	97	113	36	72	248	188	83	57	27	75	2000	11.6
	56	M56x5.5	123	116	121	36	84	274	202	91	64	27	85	2100	15.0
	64	M64x6.0	123	111	126	36	100	274	202	91	64	32	95	2200	16.3

① 设计安全系数为4:1。

工作极限载荷

吊环安装方式												
		1	2	1	2	2	2	2	3~4	3~4	3~4	
吊环数量		1	2	1	2	2	2	2	3~4	3~4	3~4	
起吊角度		0°	0°	90°	90°	0~45°	45~60°	不对称	0~45°	45~60°	不对称	
形式		螺纹MxP	工作极限载荷(吨)									
型号	No.											
SLPH	8	M 8x1.25	0.8	1.6	0.5	1	0.7	0.5	0.5	1.1	0.8	0.5
	10	M10x1.5	1.2	2.4	0.7	1.4	1	0.7	0.7	1.5	1.1	0.7
	12	M12x1.75	2	4	1	2	1.4	1	1	2.1	1.5	1
	14	M14x2.0	2.4	4.8	1.5	3	2.1	1.5	1.5	3.2	2.3	1.5
	16	M16x2.0	3.2	6.4	2	4	2.8	2	2	4.2	3	2
	18	M18x2.5	5	10	2.5	5	3.5	2.5	2.5	5.3	3.8	2.5
	20	M20x2.5	5.6	11.2	3	6	4.2	3	3	6.3	4.5	3
	24	M24x3.0	9.2	18.4	5	10	7	5	5	10.5	7.5	5
	30	M30x3.5	12	24	7.8	15.6	10.9	7.8	7.8	16.4	11.7	7.8
	36	M36x4.0	14	28	12.5	25	17.5	12.5	12.5	26.3	18.8	12.5
	42	M42x4.5	16	32	15.6	31.2	21.8	15.6	15.6	32.8	23.4	15.6
	48	M48x5.0	20	40	20	40	28	20	20	42	30	20
	56	M56x5.5	22	44	22	44	30.8	22	22	46.2	33	22
	64	M64x6.0	22.5	45	22.5	40	28	20	20	42	30	20

旋转吊环螺栓



订货范围
Order

型式

SLPH10



3 个工作日