

浮动接头

Floating Joint

简易连接型 内螺纹型

NEW
新产品
绿色字体型号



T尺寸固定型



CAD 2D 3D

型号	类型	T尺寸固定型	材质		表面	表面
			国标	相当	处理	硬度

JFA	内螺纹型	T尺寸固定型	45	S45C	镀硬铬	750HV~
-----	------	--------	----	------	-----	--------



型式		螺距	L												T	t	D	S	e				
型号	M																						
JFA	3	0.5	2	3	4	5	6							5	3	6	8	9.2					
	4	0.7	2	3	4	5	6	8								6	7	10	11.5				
	5	0.8		3	4	5	6	8	9	10						7	8	12	13.9				
	6	1.0		3	4	5	6	8	9	10	12					8	4	10	14	16.2			
	8	1.0			4	5	6	8	9	10	12	13	15	16	9	13		17	19.6				
		1.25			4	5	6	8	9	10	12	13	15	16									
	10	1.25			4	5	6	8	9	10	12	13	15	16	19	20		11	16	21	24.2		
		1.5			4	5	6	8	9	10	12	13	15	16	19	20							
	12	1.25				5	6	8	9	10	12	13	15	16	19	20		12	18	23	26.6		
						5	6	8	9	10	12	13	15	16	19	20							
	14	1.5					5	6	8	9	10	12	13	15	16	19		20	13	5	25	30	34.6
							5	6	8	9	10	12	13	15	16	19		20					
	16							8	9	10	12	13	15	16	19	20							
	18								8	9	10	12	13	15	16	19		20					
22											12	15		20									
																17	6	27	32	36.9			



订货范例
Order

型式 - 螺距 - L
JFA3 - 0.5 - 2



7 个工作日



T尺寸指定型



CAD 2D 3D

型号	类型	T尺寸指定型	材质		表面	表面
			国标	相当	处理	硬度

JFAF	内螺纹型	T尺寸指定型	45	S45C	镀硬铬	750HV~
------	------	--------	----	------	-----	--------

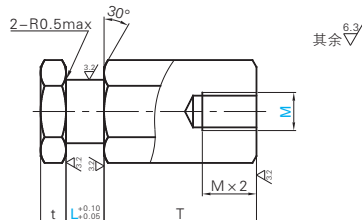

① t+L+T≤3M时，螺纹孔变为通孔。

型式		螺距	L										T	t	D	S	e			
型号	M												最小单位1							
JFAF	3	0.5	2	3	4	5	6						3~50	3	6	8	9.2			
	4	0.7		3	4	5	6	8	9	10			3~40		7	10	11.5			
	5	0.8		3	4	5	6	8	9	10		8			12	13.9				
	6	1.0		3	4	5	6	8		12		10		14	16.2					
	8	1.0			4	5	6	8						4	13	17	19.6			
		1.25			4	5	6	8	9	10	12	13								
	10	1.25			4	5	6	8	9	10	12	15				5~100	16	21	24.2	
		1.5			5	6	8	10												
	12	1.25			5	6	8	9	10	12	13	15	16	19	20		8~100	18	23	26.6
					5	6	8	9	10	12	13	15	16	19	20	21		26	30	
	14				5	6	8	9	10	12	13	15	16	19	20					
	16	1.5					8	9	10	12	13	15	16	19	20	10~100	5	25	30	34.6
	18						8	9	10	12	13	15	16	19	20		6	27	32	36.9
	22																			



订货范例
Order

型式 - 螺距 - L - T
JFAF3 - 0.5 - 2 - 3



7 个工作日