

一体型丝杠支撑座

Integral screw support

简易型・内置轴承
整合传动用

NEW

新产品





绿色字体型号



CAD 2D 3D


型号	M 材质		S 表面处理		A 附件
	主体	丝杠支撑座	主体	丝杠支撑座	
BTUS	铝合金	CF8C	本色阳极氧化	四氧化三铁保护膜	轴环: 2个
BTUSN				无电解镀锌	锁紧螺母: 1个

新型号

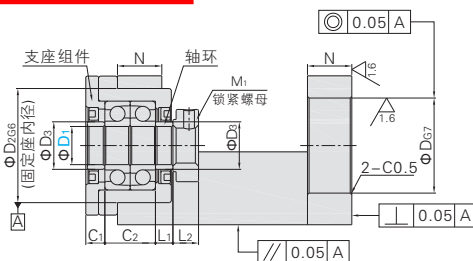

A-A向视图

适用规格: BTUS20-60-35



型式		适用电机法兰 F	中心高 h	D _{G7}	P.C.D	D ₂	D ₃	E ₁	E ₂	E ₃	H	H ₁	K	e	X	M ₂	N	L	
型号	适用滚珠丝杠轴径 D ₁																		
BTUS BTUSN	8	38	21	30	45	28	11.5	47	67	9	41	19	40	10	5.5	M3	12	43	
		40			46	34	14								M4				
	10	38	25		45			54	74	10	46	23	42		6.5	M3	14	46	
		40			46											M4			
	12	38			45					47			44						M3
		40			46	36	15									M4			
	15	60	31	50	70			58	84	15	62	26	62	13	8.5	M5	17	56	
		80	41	70	90	40	20	71	97		61					M5		63	
	20	60	35	50	70			74	106		82	36	82	16	10.5	M6	24	72	
			41	70	90	57	25	77	117		70	30	70	M5		69			
		80	41	70	90			87	127	22	82	36	82	20		M6		78	

适用滚珠丝杠轴径 D ₁	适用电机法兰 F	A	B	B ₁	B ₂	C ₁	C ₂	L ₁	L ₂	t	M ₁ (细牙螺纹)	建议丝杠支座		建议电机规格		
		固定侧		支撑侧		止口规格	安装P.C.D									
8	38	52	64	40	35	5	14	5.5	6.5	12	M8x1.0	BTR8	—	30	45	
	40															46
10	38	56	70	42	42	6	16	8	14	M10x1.0	BTR10	BTF10	—		45	
	40															
12	38	58	72	44	44	52	18	M12x1.0	BTR12	BTF12	50	45				
	40														46	
15	60	80	98	62	68	8	18	10	23	M15x1.0		BTR15	—	70		
	80	106	128	82											90	
20	60	94	116	70	68	14	28	11	11	M20x1.0	BTR20	—		50		
	80	106	128	82											70	
																90

① 本页型号适用伺服电机。



订货范例
Order

型式 - F - h
BTUS15 - 60 - 31



5 个工作日

F A 工厂自动化零件
三益精密 www.3g-es.com

高品质 低价格 快交期
Good quality Good cost Good delivery

丝杠支撑座