


同步带用金属件
Timing Belt Clamp Plates

过压防止型

NEW
新规格
绿色字体型号

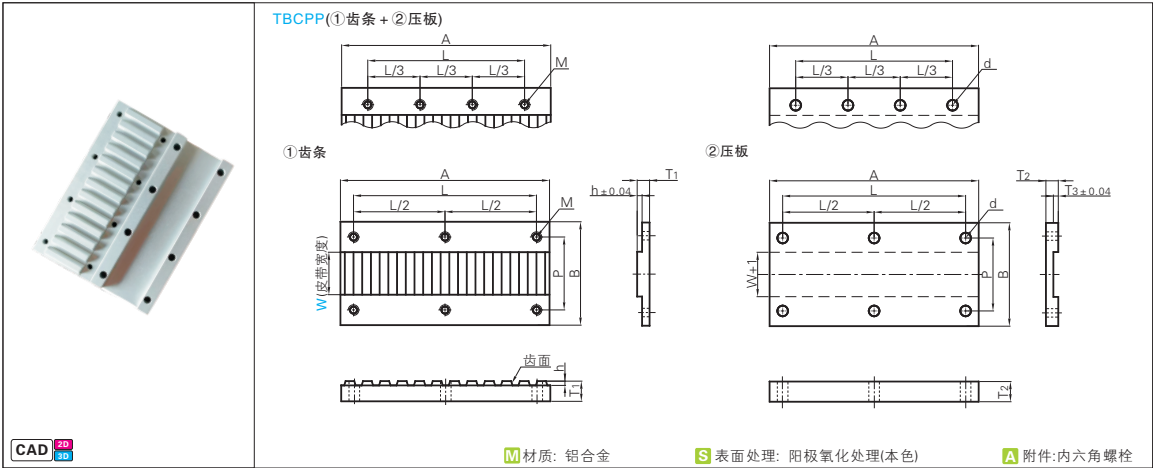

型式			皮带 公称宽度	A	B	T1	T2	T3	h	L	P	M	d	附属 螺栓	安装 孔数			
型号	齿型	W																
TBCPP (①+②)	XL	6.4	025	66	24	6	4.5	2.10	1.30	56	13	M4	4.5	M4-10	6			
		9.5	037		26						16							
		12.7	050		30						20							
	L	12.7	050	124	32	8	5.5	3.33	2.05	111	21	M5	5.5	M5-12	8			
		19.1	075		38						27							
		25.4	100		46						34							
	H	19.1	075	165	38	10	6.5	4.15	2.55	147	27			M5		5.5	M5-14	8
		25.4	100		46						34							
		38.1	150		58						46							
		50.8	200		70						59							
	S3M	6	060	39	18	4	3.5	1.94	1.25	31	11	M3	3.4	M3-6	6			
		10	100		22						14							
		15	150		28						20							
	S5M	10	100	65	26	6	5.5	3.14	2.00	51	17	M4	4.5	M4-10	8			
		15	150		32						22							
		25	250		42						32							
	S8M	15	150	104	34	8	6.5	4.72	3.00	84	23	M5	5.5	M5-12	8			
		25	250		44						33							
		30	300		50						38							
		40	400		60						48							
	MA3	7	70	39	20	4	3.5	1.80	1.10	31	13	M3	3.4	M3-6	6			
		10	100		24						16							
		15	150		29						21							
	MA5	10	100	65	26	6	5.5	2.90	1.70	51	17	M4	4.5	M4-10	8			
		15	150		32						22							
		25	250		37						32							
	MA8	15	150	104	34	8	6.5	4.30	2.80	84	23	M5	5.5	M5-12	8			
		20	200		39						28							
		25	250		45						33							
		40	400		60						48							
	T5	10	100	65	26	6	4.5	2.20	1.40	51	17	M4	4.5	M4-10	6			
		15	150		32						22							
		20	200		38						27							
		25	250		43						32							
	T10	15	150	130	34	8	6.5	4.30	2.70	111	23	M5	5.5	M5-12	8			
		20	200		40						28							
		25	250		44						33							
		30	300		50						38							
		40	400		60						48							
		50	500		70						58							
	AT5	10	100	65	26	6	4.5	2.20	1.40	51	17	M4	4.5	M4-10	6			
		15	150		32						22							
		15	150		34						23							
	AT10	20	200	130	40	8	6.5	4.30	2.70	111	28	M5	5.5	M5-12	8			
		20	200		40						28							
		25	250		44						33							

① 本商品的设计适用于自由端同步带(聚氨酯型)。与其它皮带咬合时, 请确认皮带的背厚及商品尺寸后再使用。
② 齿型依据同步带和自由端同步带。
③ A尺寸为6齿(金属件)啮合设定。



订货范例
Order

型式
TBCPP-XL6.4



5 个工作日

同步带用金属件